

PAJERO SPORT



Find The Far Beyond.

The world is yours in the new PAJERO SPORT. Whether confidently exploring rough terrain in the wilderness or attracting admiration on city streets, you'll be traveling first class all the way.



GLS with optional equipment / Titanium Gray Metallic [U17]



Premium Comfort

Adventure calls from the well-appointed cockpit, which surrounds you with solid craftsmanship, supportive comfort, intelligent features and a wide open view. From refined meters to sophisticated floor console, every feature is fine-tuned to enhance driving pleasure and keep you in confident control.

GLS (8A/T) with optional equipment / Leather (Black)



GLS (8A/T) with optional equipment / Leather (Black)

Pleasant Journeys

Every guest feels special in the luxurious interior. From leather seats with smooth gathers and dual layered cushioning to relaxing spaciousness and an optimized driving position, it keeps everybody comfortable and in the best of spirits.



SUPER SELECT 4WD-II
C/D LOCK **2H**
For normal road conditions

SUPER SELECT 4WD-II
C/D LOCK **4H**
For rough roads and hazardous conditions

SUPER SELECT 4WD-II
C/D LOCK **4HLc**
For rugged terrain with low-grip surfaces

SUPER SELECT 4WD-II
C/D LOCK **4LLc**
For rocks, mud, sand, deep snow, etc.




OFF ROAD MODE

Improve traction when driving off road by entering the GRAVEL, MUD/SNOW, SAND or ROCK* setting. Simply press the OFF ROAD MODE selector until the appropriate mode appears in the multi-information display. Engine output, transmission settings and braking adjust accordingly to optimize performance.




* The ROCK setting is available in the 4LLc setting only. Note: OFF ROAD MODE is only available in the 4HLc and 4LLc settings.

SUPER SELECT 4WD-II

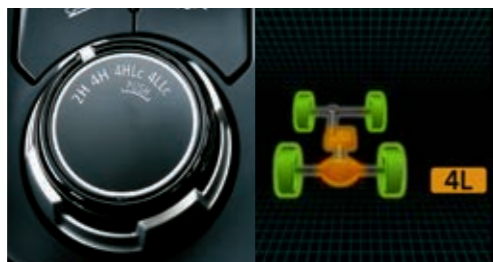

Using the drive mode selector dial, you can switch between 2WD (2H) and 4WD (4H, 4HLc) with shift-on-the-fly convenience at up to 100km/h. When the going gets rough, lock the center differential by entering the 4HLc setting for rugged terrain or the 4LLc setting for inclines, mud, sand and snow. (Models with 4D56 engine and 5M/T feature Super Select 4WD in place of Super Select 4WD-II.)

Notes: Super Select 4WD-II lets you shift between 2H, 4H and 4HLc modes at speeds up to 100km/h. Vehicle must be stopped when switching between 4HLc and 4LLc. Please see the owner's manual for additional information.

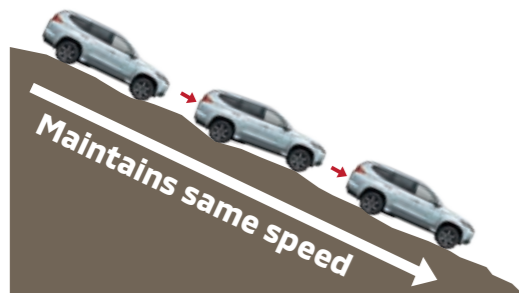

Hill Descent Control [HDC]

Pressing the HDC mode selector activates HDC, which automatically applies the brakes downhill at 2 - 20km/h. This lets you concentrate on steering and travel downhill with greater safety without having to manually apply the brakes.

Note: Hill Descent Control [HDC] is not a substitute for safe driving. Never rely solely on this function while driving on steep roads. When driving on slippery roads such as muddy, icy or unpaved road, your vehicle will not allow you to stay at a certain low speed, which may lead to a serious accident. Please see the owner's manual for additional information.

Hill Start Assist [HSA]

When starting on a steep slope, HSA helps prevent you from rolling backwards while you release the brake by maintaining the braking force for up to two seconds until the accelerator is applied.




With Hill Start Assist **Without Hill Start Assist**

Note: Hill Start Assist [HSA] is not a substitute for safe driving. Never rely solely on this function while driving on steep roads. Your vehicle may move backwards if the brake pedal is heavily loaded, or if the road is very steep or slippery. This function is not designed to keep the vehicle stopped in place on uphill slopes for more than 2 seconds. Do not rely on this function to maintain a stopped position as an alternative to depressing the brake pedal. Please see the owner's manual for additional information.

Active Stability & Traction Control [ASTC]

Active Stability & Traction Control independently regulates braking force to the wheels during cornering to help maintain excellent vehicle stability when needed. It also optimizes traction to prevent loss of torque whenever wheel spin is detected by controlling engine output and applying brake force to the spinning wheels.

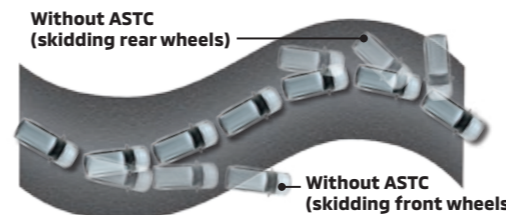

Note: The control capabilities of ASTC are supplemental only. Please drive safely and never rely solely on these functions while driving. Be sure to use the same specified type and size of tires on all 4 wheels. Do not install any aftermarket limited slip differential on your vehicle. Please see the owner's manual for additional information.

All-terrain confidence

Because challenges come in all shapes and sizes, this model is designed to climb up, over, around and through the toughest terrain.



*1 30° approach angle is only applicable to models without optional accessories
*2 24.6° departure angle when 265/70R16 tires are mounted



Class-leading 5.6m turning radius

The turning radius is surprisingly small for a vehicle of this size, making it especially easy to park and maneuver.



Solid Handling

Handling is stable and accurate on and off road, in all kinds of weather and driving conditions, thanks to selectable 2WD and 4WD modes, an OFF ROAD MODE that enhances traction on demanding surfaces, intelligent assistance in challenging conditions, an advanced suspension and outstanding all-around clearance.




GLS with optional equipment / Medium Red Mica [P17]

Dynamic Power

Power is supplied in abundance whenever you need it from your choice of an efficient new 2.4-liter diesel, dynamic 2.5-liter diesel or 3.0-liter V6 gasoline engine. Whatever the driving conditions, you'll have what it takes to accomplish your mission.

New 2.4-liter MIVEC Direct Injection Diesel


Quiet, powerful and fuel efficient, this lightweight diesel engine delivers outstanding torque throughout the low-to-mid rpm range for highly satisfying response during everyday driving.

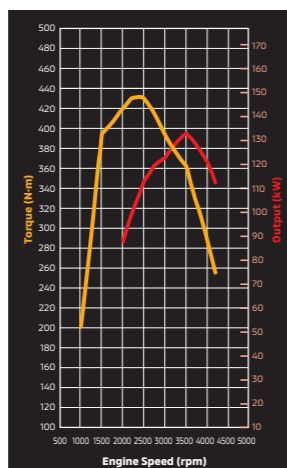

2.4-liter MIVEC intercooled turbocharged DI-D (133kW/3500rpm)

2.5-liter Direct Injection Diesel

With its generous displacement and intercooled turbocharger, this directly injected diesel engine (with 5M/T or 5A/T) reliably generates more than ample power on demand.

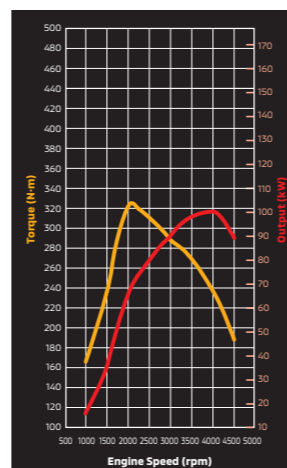


2.5-liter intercooled turbocharged DI-D (100kW/4000rpm)




3.0-liter V6 MIVEC

Tough and powerful, the high-displacement V6 engine supplies strong acceleration even when carrying heavy loads or traveling up mountain roads.

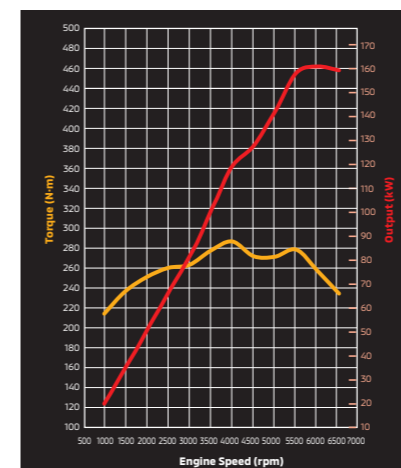

3.0-liter V6 MIVEC (Euro2/4 161kW/6000rpm)

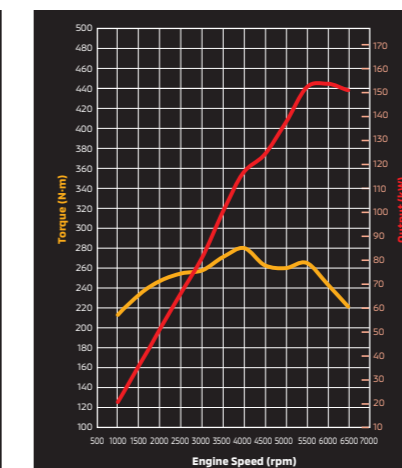

3.0-liter V6 MIVEC (Euro5 154kW/6000rpm)



8-speed automatic transmission

To enjoy a smoother, more luxurious ride and improved fuel efficiency, choose the 8-speed automatic transmission – the first from Mitsubishi Motors.



Paddle shifters

Sporty paddle shifters let you shift gears with a press, without removing your hand from the steering wheel.



6-speed manual transmission

For a feeling of total control that many enthusiasts demand, choose the 6-speed manual transmission with wide gear ratio and highly efficient clutch operation.

Technology For Peace Of Mind


Sophisticated new safety features intelligently support safer driving whether you are parking or cruising on the highway. You can drive with greater confidence knowing that all occupants are solidly protected by a robust RISE body and comprehensive safety measures.

Multi-around Monitor

The views from cameras mounted on the front, rear and sides of the vehicle (including a bird's-eye view) can be displayed in various combinations to reveal what is in blind spots and help you park more safely.



Rear view + Bird's-eye view



Adaptive Cruise Control [ACC]

Maintains a selected distance between your vehicle and the car ahead via radar to lend driving assistance and enhance driving comfort. It especially reduces driver stress during slow traffic jams on highways.



ACC indication on multi-information display

No vehicle in front



Your selected speed is maintained even if you remove your foot from the accelerator pedal.

Vehicle in front



Your selected distance between vehicles is maintained.

Vehicle in front (slowing/stopping)



When the vehicle in front slows or stops, ACC slows or stops your vehicle.

Blind Spot Warning system [BSW]

This safety feature uses ultrasonic sensors on the rear bumper to detect vehicles in your rear blind spots, on the right and left sides. When a vehicle is detected, a warning indicator appears on the door mirror on that side.



Ultrasonic misacceleration Mitigation System [UMS]

To help prevent collisions while parking, a buzzer sounds and a warning displays if front or rear sensors detect a nearby obstacle. Engine output is also controlled if you suddenly accelerate by accident.

Engine output control activates:

- When driving at very low speeds (not in N or P position)
- When obstacle/vehicle is within a short distance
- When accelerator pedal is pushed hard or abruptly
- When driver is not turning to avoid obstacle/vehicle



Forward Collision Mitigation system [FCM]

Helps prevent a frontal collision or reduce damage if the collision becomes unavoidable. Responds to vehicles via radar.

FCM indication on multi-information display

BRAKE!

Danger of collision



Warning + braking assistance

High danger of collision



Warning + auto braking

Extremely high danger of collision



Warning + strong auto braking

Note: The detection and control capabilities of the Blind Spot Warning system [BSW] are supplemental only and do not warn you of vehicles in blind spots in every situation. Please do not rely solely on this system while driving. The blind spot monitor may not operate normally in some cases, depending on traffic, weather, road surface conditions and the presence of obstructions. Drivers are fully responsible for their own safe driving. The radar wave graphics are used for illustrative purposes only and do not represent the actual sensor application.

The detection and control capabilities of the Ultrasonic misacceleration Mitigation System [UMS] are supplemental only and do not prevent misacceleration in every situation. Please drive safely and do not rely solely on this system while driving. To prevent the engine output control provided by UMS from causing an impediment during normal driving in rough-road driving conditions, the system automatically de-activates and indicates UMS OFF in the meter cluster when the 4LLC, R/D lock, or HDC setting is ON or the ASTC function is OFF. No function completely stops the vehicle via the automatic braking. The vehicle creeps forward even when engine output is regulated. The sensing system may not work for netlike and sharp-edged obstructions that do not sufficiently reflect ultrasonic sound.

UMS does not include a function which keeps the vehicle stationary. The driver is responsible for stopping the vehicle by pressing the brake pedal as required by the driving conditions. The ultrasonic sensor wave graphics are for illustrative purposes only and do not represent the actual sensor application.

The detection and control capabilities of the Forward Collision Mitigation system [FCM] are supplemental only and do not prevent collisions in every situation. Please drive safely and do not rely solely on this system while driving. FCM may not activate in some situations. Please read the owner's manual carefully and be aware of these limitations. Auto braking does not operate against stationary vehicles when the speed of your car is above approx. 30km/h. Since FCM has no function to maintain braking, the brake is released approximately 2 seconds after stopping. To prevent the vehicle from moving thereafter, the driver may have to hold the brake pedal down. In some cases, FCM may not function if the driver takes actions for accident avoidance through steering or acceleration operation.

7 SRS airbags*

In the event of a collision, seven SRS airbags help protect you and your passengers by absorbing the force of impact. The system includes front airbags, front side airbags, curtain airbags (including third-row curtain airbags in the 7-seater) and a driver's knee airbag.

*Front airbags are standard. Side, curtain and driver's knee airbags are optional.



Note: Airbags are part of a Supplemental Restraint System [SRS]. To decrease the risk of injury from a deploying airbag, always wear your seatbelt, sit upright in the middle of the seat and do not lean against the door. Always place children 12 and under in the rear seat and use appropriate child restraints. Never place a rear-facing infant restraint in the front seat. Please see the owner's manual and the instructions provided with your child restraint for additional information.

Pretensioners

Pretensioners on the front seatbelts automatically tighten the belts in the event of a collision to help restrain the driver and front passenger.

Note: Single pretensioners are standard, double pretensioners are optional.




RISE body

Collision safety performance is significantly enhanced by Mitsubishi Motors' RISE (Reinforced Impact Safety Evolution) body, which efficiently absorbs energy and maintains high cabin integrity in the event of a collision.



Rigid lightweight body

The body is extremely sturdy and lightweight, due to the generous use of high tensile strength steel plates that also contribute to a high level of collision safety.

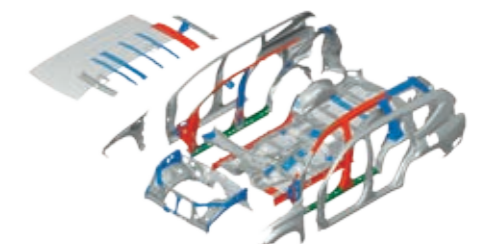

Note: The detection and control capabilities of ACC are supplemental only. Please drive safely and never rely solely on these functions while driving. ACC may not activate in some situations. This system may not correctly detect the actual situation depending on the type of vehicle in front and its conditions, the weather conditions, and the road conditions. Additionally, the system may be unable to decelerate sufficiently if the vehicle in front applies the brakes suddenly or another vehicle cuts into your path, so your vehicle approaches the front vehicle. When the car stops, ACC finishes its control and the brake is released approximately 2 seconds after stopping. To prevent the vehicle from moving thereafter, the driver may have to hold the brake pedal down. Please see the owner's manual for additional information.

Feature Highlights



LED headlamps and daytime running lamps
Sophisticated LED headlamps and daytime running lamps contribute to an appealing, high-quality personality.



LED rear combination lamps
Dynamic LED rear combination lamps boldly proclaim this is no ordinary SUV.



Auto light function
This feature contributes to both convenience and safety by automatically turning the headlamps on or off depending on the level of ambient light outside the vehicle. The level of light is determined by a rain/light sensor that can distinguish between overpasses and tunnels.



265/60R18 tire with 18-inch alloy wheel (two tone)

265/60R18 tire with 18-inch alloy wheel

265/70R16 tire with 16-inch alloy wheel



High-contrast meters and multi-information display



Steering switches



Electric parking brake
The parking brake is easy to operate via stylish switch. Simply pull the switch up to apply the parking brake or push the switch down to release it.



USB port (for charging) & Seatback pocket



AC power outlet
Simply plug in to power small electric devices up to 150W.
Note: The maximum voltage and plug type may vary depending on market model.



Keyless operation key



Engine switch

Feature Highlights




Dual-zone automatic climate control air conditioner

The powerful air conditioning system provides separate temperature settings for the driver and front passenger.



Powerful front and rear air flow

The air conditioning system now provides significantly more powerful cooling with top-class air flow that keeps all passengers comfortable even in the hottest weather.

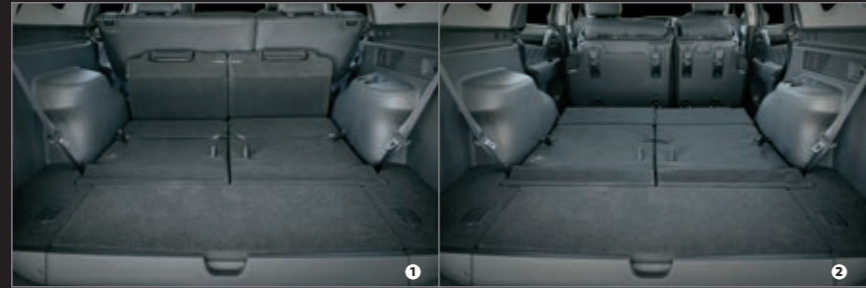

Cargo space

1 Third-row seatbacks folded down

2 Second and third-row seatbacks folded down




Rear entertainment system



Wide 2DIN AM/FM DVD display audio

Enjoy movies on the high-res 6.1-inch WVGA display and music from your audio player via USB, HDMI or AUX port. Or display views from the rear view camera.

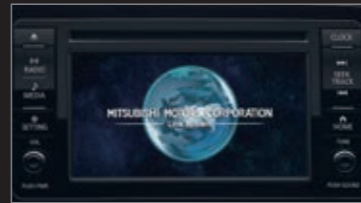

Wide 2DIN AM/FM CD display audio

Controlling the audio system is easy on the 6.1-inch QVGA touch-panel display, which can also display the views from the rear view camera.



CD/MP3 player

A quality tuner/CD player and USB port on the floor console enable easy connection with an iPod or other audio player for charging or listening pleasure.

Genuine Accessories



Note: Actual accessories may vary from those shown or change without notice. Available accessories may vary by market.

GLX

2.5-liter intercooled turbocharged DI-D (5M/T, 5A/T)



Interior shown: 5M/T model

GLS for 6M/T models

2.4-liter MIVEC intercooled turbocharged DI-D (6M/T)



GLS for 8A/T models

3.0-liter V6 MIVEC (8A/T)

2.4-liter MIVEC intercooled turbocharged DI-D (8A/T)



Optional shown: Leather seats

Exterior Colors

Jet Black Mica (X37)



Deep Bronze Metallic (C17)



Medium Red Mica (P17)



Deep Blue Mica (T64)



Titanium Gray Metallic (U17)



Sterling Silver Metallic (U25)



White Pearl (W54)



Seat Materials And Colors



High quality fabric
(Water repellent, Black)



High quality fabric
(Water repellent, Beige)



Leather
(Black)



Leather
(Beige)

Exterior And Interior Color Combinations

■ Standard □ Optional

Model	Grade	LHD		RHD	
		GLX	GLS	GLX	GLS
Seat materials and colors	High quality fabric (Black/Beige)	■	■	■	■
	Leather (Black/Beige)	□	□	□	□
Exterior colors	Jet Black Mica X37	■	■	■	■
	Deep Bronze Metallic C17	■	■	■	■
	Medium Red Mica P17	■	■	■	■
	Deep Blue Mica T64	■	■	■	■
	Titanium Gray Metallic U17	■	■	■	■
	Sterling Silver Metallic U25	■	■	■	■
White Pearl W54	■	■	■	■	

Note: Genuine leather is used for base and backrest of driver, front passenger and 2nd row outer seats. All other seat materials are synthetic leather.

Note: Colors shown may differ slightly from actual colors due to printing process. Please consult your local Mitsubishi Motors dealer/distributor for actual colors.

TECHNICAL SPECIFICATIONS

Model	Drive system	LHD										
		2WD					4WD					
		4D56 D4 I/C T/C		4N15 D4 I/C T/C		6B31 MIVEC	4D56 D4 I/C T/C		4N15 D4 I/C T/C		6B31 MIVEC	
Grade	GLX		GLS			GLX		GLS				
Model code	KR3WGNMFL	KR3WGYMFL	KR1WGJHFPL	KR1WGUFPPL	KR5WGUPML	KS3WGNMFL	KS3WGYMFL	KS1WGJHFPL	KS1WGUFPPL	KS5WGUPML		
Dimensions and weights												
Overall length	mm	4785					4785					
Overall width	mm	1815					1815					
Overall height	W/O roof rails	1800					1800					
	With roof rails	1805					1805					
Wheelbase	mm	2800					2800					
Track	Front	1520					1520					
	Rear	1515					1515					
Overhang	Front	880					880					
	Rear	1105					1105					
Min. ground clearance	mm	218					218					
Curb weight (7-seater)	kg	1900	1910	1910 (Euro5: 1920)	1940 (Euro5: 1950)	1880	2005	2015	2010 (Euro5: 2025)	2040 (Euro5: 2050)	1980	
		2600					2600					
Gross vehicle weight	kg	2600					2600					
Seating capacity	persons	7					7					
Performance												
Max. speed*	km/h	168	166	180	182	182	168	166	180	182	182	
Climbing ability	tanθ	-					1					
Min. turning radius	m	5.6					5.6					
Approach angle	degrees	30.0					30.0					
Ramp break-over angle	degrees	23.1					23.1					
Departure angle	degrees	24.6		24.2			24.6		24.2			
Engine												
Fuel type/Octane		Diesel		Diesel		Unleaded gasoline, RON 95 and over	Diesel		Diesel		Unleaded gasoline, RON 95 and over	
Displacement	cc	2,477		2,442		2,998	2,477		2,442		2,998	
Bore and stroke	mm	91.1 x 95.0		86.0 x 105.1		87.6 x 82.9	91.1 x 95.0		86.0 x 105.1		87.6 x 82.9	
Compression ratio		17.0		15.5		9.5	17.0		15.5		9.5	
Emission level		Euro2 (Op: Euro4)		Euro2 (Op: Euro4, Euro5)		Euro2 (Op: Euro4, Euro5)	Euro2 (Op: Euro4)		Euro2 (Op: Euro4, Euro5)		Euro2 (Op: Euro4, Euro5)	
Max. output (EEC net)	kW/rpm	100/4,000		133/3,500		Euro2/4 161/6,000 Euro5 154/6,000	100/4,000		133/3,500		Euro2/4 161/6,000 Euro5 154/6,000	
Max. torque (EEC net)	N·m/rpm	324/2,000		430/2,500		Euro2/4 285/4,000 Euro5 279/4,000	324/2,000		430/2,500		Euro2/4 285/4,000 Euro5 279/4,000	
Electrical												
Battery		80D26L (Op: 95D31L)		95D31L	95D31L	80D26L	80D26L (Op: 95D31L)		95D31L	95D31L	80D26L	
Alternator		90A		95A	130A	130A	90A		95A	130A	130A	
Fuel systems												
Fuel supply system		Electrical fuel injection (common rail)		Electrical fuel injection (common rail)		ECI-MULTI	Electrical fuel injection (common rail)		Electrical fuel injection (common rail)		ECI-MULTI	
Fuel tank capacity	liters	68		68		70	68		68		70	
Transmission												
Type		5M/T (R5MB1)	5A/T (R5AWF)	6M/T (R6M5A)	8A/T (R8AWG)	8A/T (R8AWG)	5M/T (V5MB1)	5AT (V5AWF)	6M/T (V6M5A)	8A/T (V8AWG)	8A/T (V8AWG)	
Clutch		Hydraulic type		Torque converter		Torque converter	Hydraulic type		Torque converter		Torque converter	
Gear ratio	1st	4.313	3.520	4.280	4.845	4.845	4.313	3.520	4.280	4.845	4.845	
	2nd	2.330	2.042	2.298	2.840	2.840	2.330	2.042	2.298	2.840	2.840	
	3rd	1.436	1.400	1.437	1.863	1.863	1.436	1.400	1.437	1.863	1.863	
	4th	1.000	1.000	1.000	1.436	1.436	1.000	1.000	1.000	1.436	1.436	
	5th	0.788	0.716	0.776	1.216	1.216	0.788	0.716	0.776	1.216	1.216	
	6th	-	-	0.651	1.000	1.000	-	-	0.651	1.000	1.000	
	7th	-	-	-	0.815	0.815	-	-	-	0.815	0.815	
	8th	-	-	-	0.672	0.672	-	-	-	0.672	0.672	
	Reverse	4.220	3.224	3.959	3.825	3.825	4.220	3.224	3.959	3.825	3.825	
Transfer gear ratio	High	-	-	-	-	-	1.000	1.000	1.000	1.000	1.000	
	Low	-	-	-	-	-	1.900	2.566	2.566	2.566	2.566	
Final gear ratio		4.090	3.917	3.692	3.692	3.917	4.090	3.917	3.692	3.692	3.917	
Steering												
Type		Rack and pinion with power steering										
Suspensions												
Front		Independent double wishbone, coil springs with stabilizer bar										
Rear		3-link coil springs with stabilizer bar										
Brakes												
Brake system	Front	Ventilated disc brakes (1POT, Diameter 294mm)			Ventilated disc brakes (2POT, Diameter 320mm)			Ventilated disc brakes (1POT, Diameter 294mm)		Ventilated disc brakes (2POT, Diameter 320mm)		
	Rear	Drum brakes (Op: ventilated disc brakes)			Ventilated disc brakes			Drum brakes (Op: ventilated disc brakes)		Ventilated disc brakes		
Tires and wheels												
Tires		265/70R16 112S			265/60R18 110H			265/70R16 112S		265/60R18 110H		
Wheels		16X70J alloy wheels			18X75J alloy wheels			16X70J alloy wheels		18X75J alloy wheels		

* Measured by MITSUBISHI MOTORS CORPORATION

Note: These specifications are subject to change without notice. Please consult your local Mitsubishi Motors dealer/distributor for detailed specifications.

TECHNICAL SPECIFICATIONS

Model	Drive system	RHD				
		2WD		4WD		
Engine	4D56 D4 I/C T/C	4N15 D4 I/C T/C	6B31 MIVEC	4D56 D4 I/C T/C		4N15 D4 I/C T/C
Grade	GLX	GLS		GLX		GLS
Model code	KR3WGYMFR	KR1WGUFPFR	KR5WGUPMR	KS3WGNMFR	KS3WGYMFR	KS1WGUFPFR
Dimensions and weights						
Overall length	mm	4785			4785	
Overall width	mm	1815			1815	
Overall height	W/O roof rails	1800			1800	
	With roof rails	1805			1805	
Wheelbase	mm	2800			2800	
Track	Front	1520			1520	
	Rear	1515			1515	
Overhang	Front	880			880	
	Rear	1105			1105	
Min. ground clearance	mm	218			218	
Curb weight (7-seater)	kg	1920	1940	1880	2005	2015
Gross vehicle weight	kg	2600			2710	
Seating capacity	persons	7			7	
Performance						
Max. speed*	km/h	166	180	182	168	166
Climbing ability	tanθ	-			1	
Min. turning radius	m	5.6			5.6	
Approach angle	degrees	30.0			30.0	
Ramp break-over angle	degrees	23.1			23.1	
Departure angle	degrees	24.6	24.2		24.6	24.2
Engine						
Fuel type/Octane		Diesel	Diesel	Unleaded gasoline, RON 95 and over	Diesel	Diesel
Displacement	cc	2,477	2,442	2,998	2,477	2,442
Bore and stroke	mm	91.1 x 95.0	86.0 x 105.1	87.6 x 82.9	91.1 x 95.0	86.0 x 105.1
Compression ratio		17.0	15.5	9.5	17.0	15.5
Emission level		Euro2	Euro2	Euro2	Euro2 (Op: Euro3)	Euro2 (Op: Euro4)
Max. output (EEC net)	kw/rpm	100/4,000	133/3,500	161/6,000	100/4,000	133/3,500
Max. torque (EEC net)	N-m/rpm	324/2,000	430/2,500	285/4,000	324/2,000	430/2,500
Electrical						
Battery		80D26L (Op: 95D31L)	95D31L	80D26L	80D26L (Op: 95D31L)	95D31L
Alternator		90A	130A	130A	90A	130A
Fuel systems						
Fuel supply system		Electrical fuel injection (common rail)	Electrical fuel injection (common rail)	ECI-MULTI	Electrical fuel injection (common rail)	Electrical fuel injection (common rail)
Fuel tank capacity	liters	68	68	70	68	68
Transmission						
Type		5A/T (R5AWF)	8A/T (R8AWG)	8A/T (R8AWG)	5M/T (V5MB1)	5A/T (V5AWF)
Clutch		Torque converter	Torque converter	Torque converter	Hydraulic type	Torque converter
Gear ratio	1st	3.520	4.845	4.845	4.313	3.520
	2nd	2.042	2.840	2.840	2.330	2.042
	3rd	1.400	1.863	1.863	1.436	1.400
	4th	1.000	1.436	1.436	1.000	1.000
	5th	0.716	1.216	1.216	0.788	0.716
	6th	-	1.000	1.000	-	1.000
	7th	-	0.815	0.815	-	0.815
	8th	-	0.672	0.672	-	0.672
Reverse	High	3.224	3.825	3.825	4.220	3.224
	Low	-	-	-	1.900	2.566
Final gear ratio		3.917	3.692	3.917	4.090	3.917
Steering						
Type		Rack and pinion with power steering				
Suspensions						
Front		Independent double wishbone, coil springs with stabilizer bar				
Rear		3-link coil springs with stabilizer bar				
Brakes						
Brake system	Front	Ventilated disc brakes (1POT, Diameter 294mm)	Ventilated disc brakes (2POT, Diameter 320mm)		Ventilated disc brakes (1POT, Diameter 294mm)	
	Rear	Drum brakes (Op: ventilated disc brakes)	Ventilated disc brakes			Ventilated disc brakes
Tires and wheels						
Tires		265/70R16 112S	265/60R18 110H		265/70R16 112S	265/60R18 110H
Wheels		16X70J alloy wheels	18X75J alloy wheels		16X70J alloy wheels	18X75J alloy wheels

* Measured by MITSUBISHI MOTORS CORPORATION

Note: These specifications are subject to change without notice. Please consult your local Mitsubishi Motors dealer/distributor for detailed specifications.

Note: Hazardous driving may cause serious injury or vehicle damage. Please drive safely at all times.


STANDARD AND OPTIONAL EQUIPMENT

■ Standard □ Optional - Not available

Model	Drive system	LHD										RHD					
		2WD			4WD			2WD		4WD							
Trim level / Grade		GLX		GLS		GLX		GLS		GLX	GLS		GLX		GLS		
Transmission		5M/T	5A/T	6M/T	8A/T	5M/T	5A/T	6M/T	8A/T	5A/T	8A/T	5M/T	5A/T	8A/T	5A/T		
Engine		4D56 D4 I/C T/C		4N15 D4 I/C T/C		6B31 MIVEC		4D56 D4 I/C T/C		4N15 D4 I/C T/C		6B31 MIVEC		4D56 D4 I/C T/C		4N15 D4 I/C T/C	
Model code		KR3WG	KR3WG	KR1WG	KR1WG	KR5WG	KR5WG	KR3WG	KR3WG	KR1WG	KR1WG	KR5WG	KR5WG	KR3WG	KR3WG	KR1WG	KR1WG
Drivetrain and Chassis																	
Drivetrain	Sport mode (4-position + manual mode)	-	■	-	■	■	-	■	-	■	-	■	-	■	-	■	■
	Super Select 4WD [SS4]	-	-	-	-	-	■	-	-	-	-	-	-	■	-	-	-
	Super Select 4WD-II [SS4-II]	-	-	-	-	-	-	■	■	■	-	-	-	-	-	■	■
	Upgraded silence	-	-	□	□	□	-	-	□	□	□	-	-	□	-	-	□
Suspensions and Differential	Front suspension (independent double wishbone, coil springs, stabilizer bar)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Rear suspension (3-link coil springs with stabilizer bar)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Rear differential lock (without LSD)	-	-	-	-	-	-	-	□	□	□	-	-	-	-	-	□
	Limited slip differential (hybrid type)	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
Tires and Wheels	Front and rear: 265/70R16 tires with 16" alloy wheels Spare: 265/70R16 tire with 16" steel wheel	■	■	-	-	-	■	■	-	-	-	■	-	-	■	■	-
	Front and rear: 265/70R16 tires with 16" alloy wheels Spare: 265/70R16 tire with 16" alloy wheel	□	□	-	-	-	□	□	-	-	-	□	-	-	□	□	-
	Front and rear: 265/60R18 tires with 18" alloy wheels Spare: 265/60R18 tire with 18" alloy wheel	-	-	■	■	■	-	-	■	■	■	-	■	■	-	-	■
	Front and rear: 265/60R18 tires with 18" alloy wheels <2 tone> Spare: 265/60R18 tire with 18" alloy wheel <2 tone>	-	-	□	□	□	-	-	□	□	□	-	□	□	-	-	□
Brakes	Lever-type parking brake	■	■	-	-	-	■	■	-	-	-	■	-	-	■	■	-
	Lever-type parking brake with leather grip	□	□	-	-	-	□	□	-	-	-	□	-	-	□	□	-
	Electric parking brake	-	-	-	-	-	-	-	-	-	-	■	-	-	■	-	-
	Anti-lock Brake System [ABS] with Electronic Brake-force Distribution [EBD]	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Others	Brake Override System	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Front ventilated disks	■	■	-	-	-	■	■	-	-	-	■	-	-	■	-	-
	Front ventilated disk brakes (2-POT)	-	-	■	■	■	-	-	■	■	■	-	-	■	-	-	-
	Rear leading and trailing drums	■	■	-	-	-	■	■	-	-	-	■	-	-	■	■	-
Others	Rear ventilated disks	□	□	■	■	■	□	□	■	■	■	□	□	■	■	□	□
	Cruise control	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
Others	Shift lock with key interlock	-	■	-	■	■	-	■	-	■	■	■	■	■	-	■	■
	Tool and jack set	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Exterior																	
Bumpers and Grille	Front (color-keyed, with silver paint garnish) and rear (color-keyed) bumper	■	■	-	-	-	■	■	-	-	-	■	-	-	■	■	-
	Front (color-keyed, with chrome garnish) and rear (color-keyed) bumper	□	□	■	■	■	□	□	■	■	■	□	□	■	■	□	□
Doors	Radiator grille (chrome)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Outer door handles (Black)	■	■	-	-	-	■	■	-	-	-	■	-	-	■	-	-
	Outer door handles (Chrome)	□	□	■	■	■	□	□	■	■	■	□	□	■	■	□	□
	Power windows (front and rear doors) (driver's side window: auto down function)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Door Mirrors	Power windows (front and rear doors) (driver's side window: auto up and down function)	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	Door sash blackout	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Door Mirrors	Power door mirrors (black)	■	■	-	-	-	■	■	-	-	-	■	-	-	■	■	-
	Power door mirrors (chrome) with folding function	□	□	■	■	■	□	□	■	■	■	□	□	■	■	□	□
	Power door mirrors (chrome) with folding function and side turn lamp	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	Door mirrors with defogger	-	-	□	□	□	-	-	□	□	-	-	-	-	-	-	-
Glass	Laminated green windshield glass	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Windshield sunshade	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	Tempered green windows - Front, rear doors and quarter	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Molding	Tempered green tailgate window with defogger	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Privacy glass windows - Tailgate, rear doors and quarter	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
Others	Beltline molding (chrome)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Side steps (styled grade type with front mudguard function)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Front skid plate	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Engine room undercover	□	□	-	-	-	■	■	-	-	-	□	-	-	□	■	-
Safety and Security	Large undercover	-	-	■	■	■	-	-	■	■	-	-	-	-	-	-	■
	Front and rear towing hook, front tie-down hook	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Rear mudguards (black molded)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Roof rails (silver)	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
Airbags	Security	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Immobilizer	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Security alarm	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	Driver's and front passenger's SRS airbags	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Seatbelts	Driver's SRS knee airbag	□	□	□	□	□	□	□	□	□	□	-	□	□	□	□	□
	Driver's and front passenger's SRS side airbags	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□
	SRS curtain airbags for 1st + 2nd + 3rd row seat for 7 seater	-	-	□	□	□	-	-	□	□							

DIMENSIONAL VIEWS

7-seater

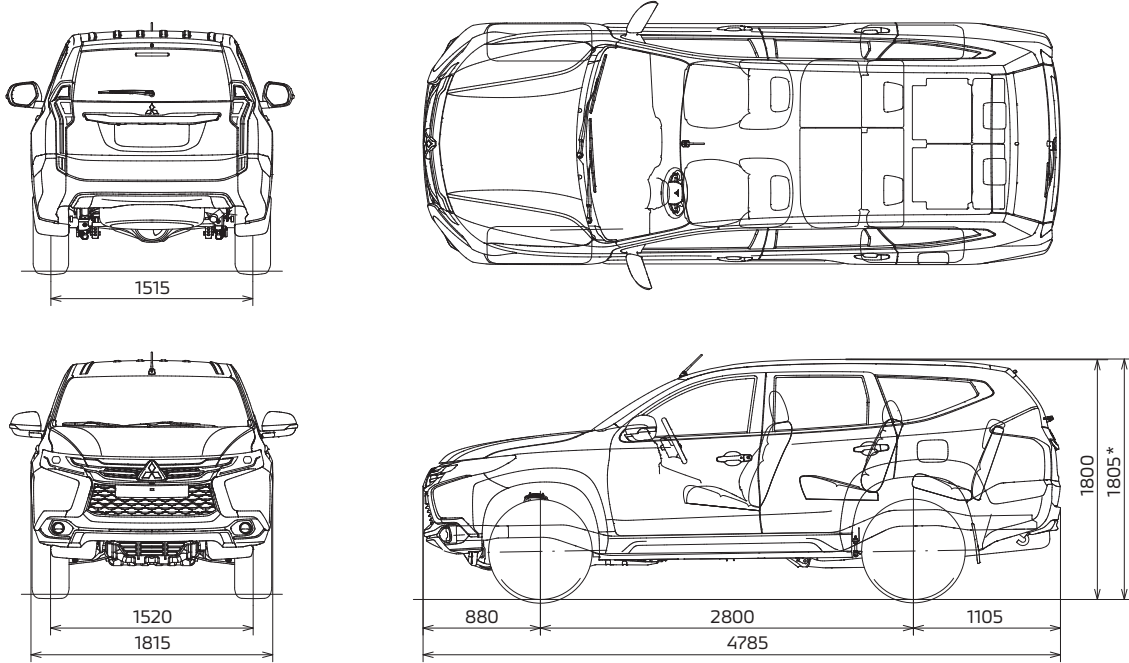

* With roof rails

Note: Glass antenna is optional.

All measurements in millimeters



www.facebook.com/MitsubishiMotors.en



www.instagram.com/mitsubishimotorsofficial



www.youtube.com/user/MitsubishiMotorsAd

 **MITSUBISHI MOTORS**

www.mitsubishi-motors.com

© 2018 – 2019 MITSUBISHI MOTORS CORPORATION. All rights reserved.
Ge/PE35C170Sep.18EG Printed in Japan



The paper used in this catalogue has been certified by the FSC™ (Forest Stewardship Council™) as having been produced through a 'chain of custody' system of forestry management, tracking and production oversight that ensures responsible consideration for the earth's ecosystem. Mitsubishi Motors has adopted the CO₂ emissions and promote more efficient use of natural resources. In this way, we hope to contribute to greater protection of the environment.