

All-new MITSUBISHI
MIRAGE
Make It Yours.



Drive@earth

All-new MITSUBISHI MIRAGE



Flexible Cargo Space
235-Liter




Comfortable Room
for 5 adults



Front Dual SRS Airbags



Anti-Lock Braking System (ABS) with Electronic Brakeforce Distribution (EBD)

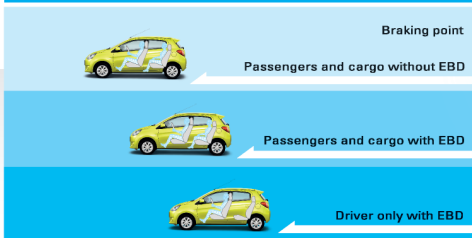

1.2L DOHC 12-Valve MIVEC (3A92) Engine

The Mitsubishi Innovative Valve timing Electronic Control system (MIVEC) adjusts the timing of the intake camshafts for optimal performance across the RPM range. By optimizing the valve timing, more air is allowed into the cylinder, ensuring a more efficient burn.

21 km/L**

**MMC test results using EU combined cycle



GLS: Keyless Operation System + Engine Push Start/Stop Button

Multi-information Display

INVECS-III CVT



GLS: Fully Automatic Air Conditioner
GLX: Manual Control

Reinforced Impact
Safety Evolution
(RISE) Body



High Tensile Steel Application

980 MPa 590 MPa
440 MPa 270 MPa



5-Speed M/T



*GLS only

GENERAL SPECIFICATIONS	GLX		GLS	
	5-Speed M/T	CVT	5-Speed M/T	CVT
Overall Length (mm)	3710		3710	
Overall Width (mm)	1665		1665	
Overall Height (mm)	1500		1500	
Wheelbase (mm)	2450		2450	
Tread (Front / Rear) (mm)	1430 / 1415		1430 / 1415	
Ground Clearance (mm)	160		160	
Turning Radius (mm)	4.4		4.6	
Gross Weight (kg)	1280	1310	1280	1310
Curb Weight (kg)	820	845	825	850
Seating Capacity (Persons)	5		5	
ENGINE	GLX		GLS	
	5-Speed M/T	CVT	5-Speed M/T	CVT
Model and Type	1.2-L 3 In-Line DOHC MIVEC Gasoline (3A92)		1.2-L 3 In-Line DOHC MIVEC Gasoline (3A92)	
Displacement (cc)	1193		1193	
Bore x Stroke (mm)	75 x 90		75 x 90	
Compression Ratio	10.5:1		10.5:1	
Max. Output (Ps / rpm)	78 / 6,000		78 / 6,000	
Max. Torque (N-m / rpm)	100 / 4,000		100 / 4,000	
Fuel System	ECI-MULTI		ECI-MULTI	
Fuel Tank Capacity (L)	35		35	

TRANSMISSION	M/T		CVT	
	5-Speed M/T	INVECS-III CVT		
Model	D Range	4.007 - 0.550		
Gear Ratio	1st	3.545		
	2nd	1.913		
	3rd	1.310		
	4th	0.973		
	5th	0.804		
	6th	-		
Final Gear Ratio	Reverse	3.214	3.771	
		4.055	3.757	
SUSPENSION	M/T		CVT	
	5-Speed M/T	INVECS-III CVT		
Front	GLX: MacPherson Strut Coil Spring			
Rear	GLS: MacPherson Strut Coil Spring with Stabilizer Torsion Beam			
BRAKES	M/T		CVT	
	5-Speed M/T	INVECS-III CVT		
Front	13" Ventilated Discs			
Rear	7" Leading and Trailing Drums			
Brake Booster	8" Master Vacuum			

TIRES & WHEELS	
GLX: 14" x 4.5J Steel (with Full Wheel Cover) with 165/65 R14 Tires	
GLS: 15" x 5.0J Alloy Wheels with 175/55 R15 Tires	
STEERING	
Gear Type	Rack and Pinion with Power Steering (Electronic Type)
Steering Wheel	GLX: 3-Spoke Urethane GLS: 3-Spoke Leather-Wrapped with Silver-Accent
SAFETY	
Front Seat	3P ELR with Pretensioner and Adjustable Seatbelt Anchor x2
Rear Seat	GLX: 3P ELR x2 & 2P Lapbelt x1 GLS: 3P ELR x3
• Brake Override System • ISO-Fix Child Restraint x2 / Tether Anchor x2 (GLS) • Dual SRS Airbags • Side Impact Beams • Laminated Green Windshield • Child Proof Lock	
1. Mitsubishi Motors Philippines Corporation reserves the right to alter any specification without prior notice. 2. Photos and specs shown in this flyer may vary from actual unit.	
BF17001004 © Mitsubishi Motors Philippines Corporation	

On Quality:

We seek excellence in our products and services and recognize that customer satisfaction is the essence of our mission.

Comes with
5 YEARS
100,000km
WARRANTY



Drive@earth