



mitsubishi
motors

Drive@earth

L200



www.new-l200triton.com

Power Tool for Life.



4WD GLS Double Cab with optional equipment / Sterling Silver Metallic [U25]

Note: Equipment may vary by market. Please consult your local Mitsubishi Motors dealer/distributor for details.



Left: 4WD GLS Double Cab with optional equipment / Earth Green Metallic [F27]
 Right: 4WD GLX Double Cab with optional equipment / Sterling Silver Metallic [U25]

A Stylish Show of Strength.

Feel the power. Feel the handling.
 Feel a new level of comfort in an entirely new class of vehicle.
 The new L200, it's all truck and all car and it changes
 the way you think about getting from one place to another.



LED daytime running lamp



Outstanding aerodynamic performance

The new L200 is streamlined based on advanced computer simulation to slip through the wind with a class-leading 0.42* Cd that lowers noise and raises fuel efficiency while enhancing both acceleration and handling stability.
 * According to internal test results.

Note: Equipment may vary by market. Please consult your local Mitsubishi Motors dealer/distributor for details.



4WD GLS Double Cab shown with optional equipment / Leather interior




4WD GLS Double Cab shown with optional equipment / Leather interior

Wide Open Spaces

Travel comfortably in the L200 Double Cab, which offers class-leading space and leg-stretching relaxation. Enhanced high-quality seating, including newly designed front seats, raises driving pleasure for all occupants. Strategically placed sound insulation and vibration damping material further contribute to a quiet, comfortable ride. Everything you need, including convenient storage features, is here to support a pleasurable journey.


Class-leading cabin length

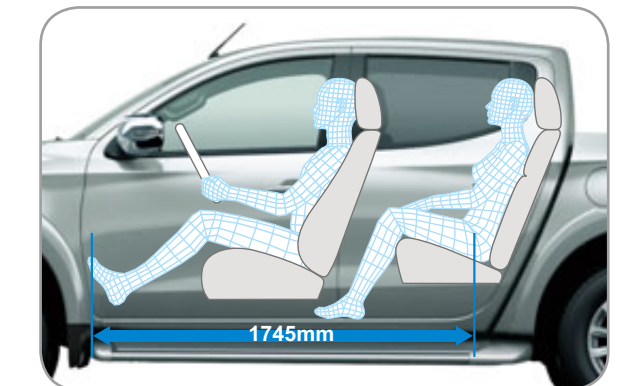

Luxurious new front seats



Quieter, more relaxing ride

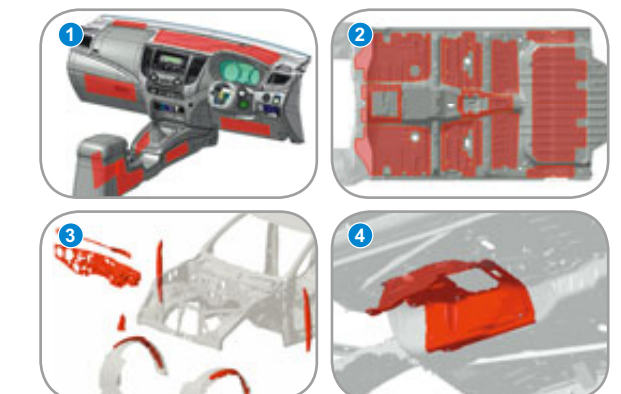


- 1 Instrument panel sound absorbing material
- 2 Floor damping material
- 3 Dashboard and fender noise insulation
- 4 Backbone sound absorbing material


Equipment may vary by model.

Note: Equipment may vary by market. Please consult your local Mitsubishi Motors dealer/distributor for details.

Powerful Efficiency

Remarkable fuel economy. Extremely low CO₂ emissions. Two exceptionally lightweight 2.4-liter turbo diesel engines produce all the power and efficiency you demand of a pickup, courtesy of leading advances including an aluminum cylinder block and precision common rail direct injection system.

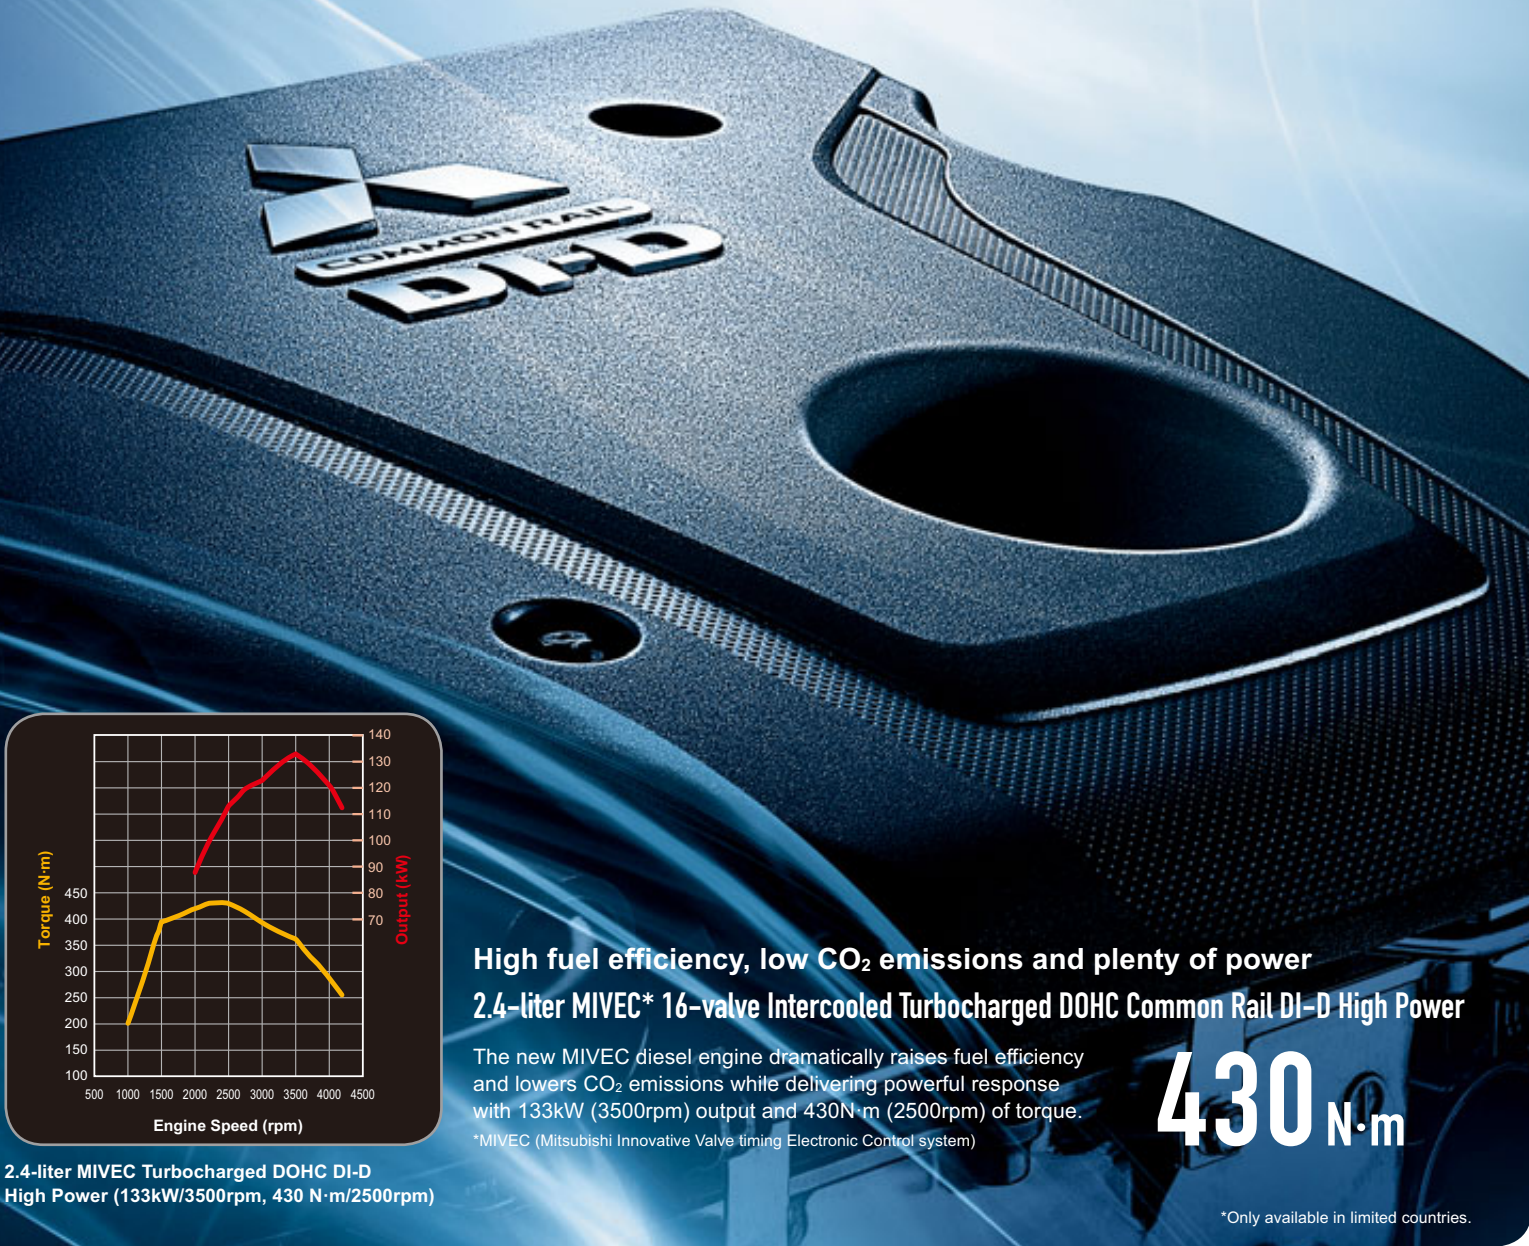

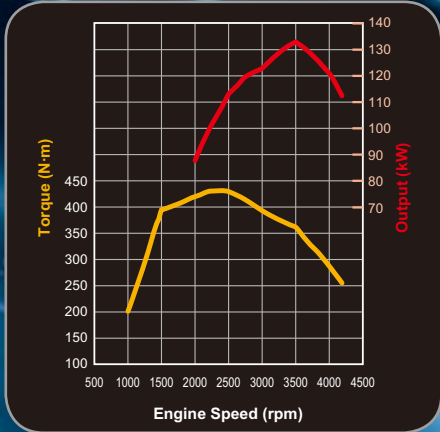


High fuel efficiency, low CO₂ emissions and plenty of power
2.4-liter MIVEC* 16-valve Intercooled Turbocharged DOHC Common Rail DI-D High Power

The new MIVEC diesel engine dramatically raises fuel efficiency and lowers CO₂ emissions while delivering powerful response with 133kW (3500rpm) output and 430N·m (2500rpm) of torque.

*MIVEC (Mitsubishi Innovative Valve timing Electronic Control system)

430 N·m

*Only available in limited countries.

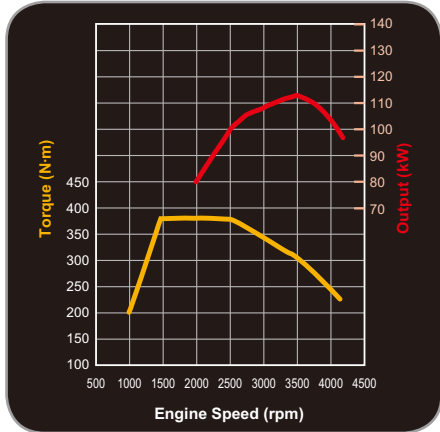

2.4-liter Turbocharged DOHC DI-D Standard (113kW/3500rpm, 380 N·m/1500-2500rpm)

Note: Equipment may vary by market. Please consult your local Mitsubishi Motors dealer/distributor for details.

Dynamic Power

Power is supplied in abundance whenever you need it, from your choice of one gasoline and four diesel engines, including a 2.5-liter powerhouse that generates an impressive 131kW/4000rpm. Whatever the driving conditions, the L200 has what it takes to accomplish your mission.

Power-boosting features give L200 DI-D engines incredible performance

2.5-liter 16-valve Intercooled Turbocharged DOHC Common Rail DI-D High Power

Four turbocharged diesel engines, including three with intercoolers, deliver the spirited response you need for serious work and play. Their common rail direct injection system optimizes fuel dispersion for peak efficiency, low emissions and power on demand.




DOHC 16-valve layout

Dual overhead camshafts and 16 cylinder valves deliver extremely high performance by optimizing fuel intake, combustion and exhaust. Precisely balanced roller rocker arms and scissor gears also fine-tune valve timing to achieve more complete combustion.




Turbocharger


A turbocharger forces more air into the combustion chambers to significantly boost power. An intercooler optimally cools the air to further improve combustion efficiency.

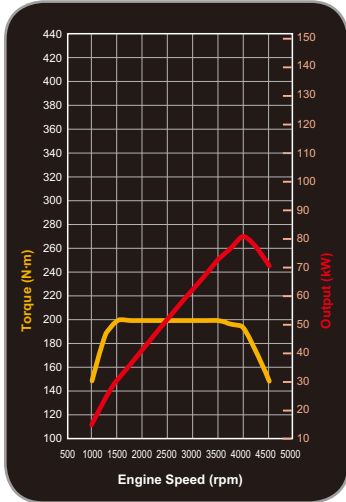


2.5-liter Turbocharged DOHC DI-D (81kW/4000rpm)

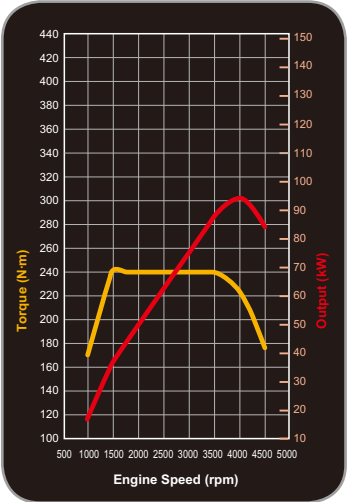

2.5-liter Intercooled Turbocharged DOHC DI-D (94kW/4000rpm)

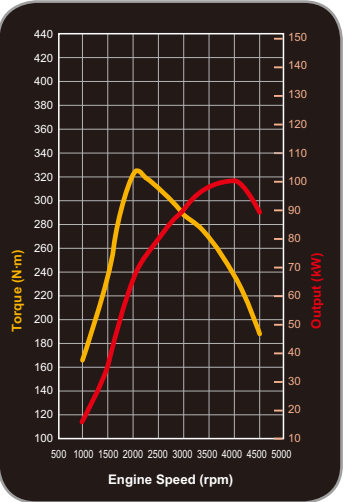

2.5-liter Intercooled Turbocharged DOHC DI-D Standard (100kW/4000rpm)

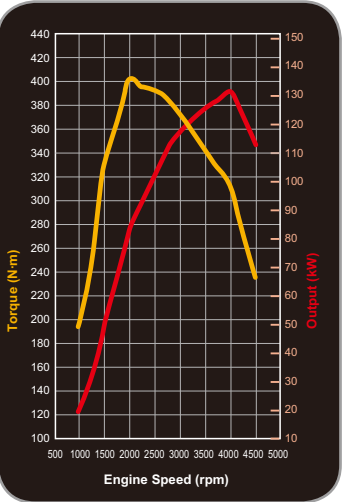

2.5-liter Intercooled Turbocharged DOHC DI-D High power (131kW/4000rpm)

2.4-liter SOHC 16-valve MPI

Whether hauling heavy loads or opening up on the highway, the 2.4-liter SOHC engine supplies more than ample horsepower and torque with low noise and vibration.



Paddle shifters

Sporty paddle shifters let you shift gears with a press — without removing your hand from the steering wheel.



5-speed automatic transmission with Sport Mode

To enjoy driving ease without sacrificing sportiness, choose the smooth-shifting 5-speed automatic transmission. Its Sport Mode lets you shift up or down with a flick of the lever for sporty, manual-like driving pleasure.



5-speed manual transmission

For a feeling of total control that many enthusiasts demand, choose the 5-speed manual transmission. Its solid stick shift provides smooth, sure operation so you can confidently and intuitively coax out maximum performance.




4WD GLS Double Cab with optional equipment / Sterling Silver Metallic [U25]

Note: Equipment may vary by market. Please consult your local Mitsubishi Motors dealer/distributor for details.



All-terrain confidence

Because challenges come in all shapes and sizes, the L200 is designed to climb up, over, around and through the toughest terrain.

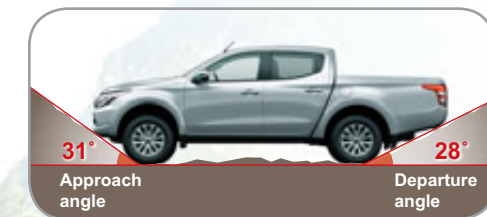

Drivability is improved, both on and off the road. Forward visibility has also been improved through refinements to the hood and wipers. Indicated angles are valid when 265/70R16 tires are mounted. When the optional rear bumper and side steps are included, the ramp break-over angle is 25° and the departure angle is 22° (stylish-type rear bumper) or 23° (chrome-type rear bumper).

Robust Handling

The L200 is built for maximum stability and traction. The rugged frame and aerodynamically contoured body contribute to solid handling and stable highway performance. Reliable 4WD traction combines with an advanced suspension to keep you in touch with surface conditions so you stay in firm control.

SUPER SELECT 4WD-II

Using the drive mode selector dial, you can switch between 2WD (2H) and 4WD (4H, 4HLc) with shift-on-the-fly convenience at up to 100km/h. When the going gets rough, lock the center differential by entering the 4HLc setting for rugged terrain or the 4LLc setting for inclines, mud and snow.

2H	4H	4HLc	4LLc
For normal road conditions	For rough roads and hazardous conditions	For rugged terrain with low-grip surfaces	For steep hills, mud, sand, deep snow, etc.


Note: Super Select 4WD-II lets you shift between 2H, 4H and 4HLc modes at speeds up to 100km/h. Vehicle must be stopped when switching between 4HLc and 4LLc. Please see the owner's manual for additional information.

EASY SELECT 4WD

Switch from smooth 2WD (2H) highway performance to rugged 4WD (4H) traction while driving at up to 100km/h. Transfer torque to all four wheels with a flick of the drive mode selector dial* in the 4H mode or by entering the 4L mode, which provides lower gear ratios and higher torque for slower speed driving in rough terrain.


* Selector lever on 5MT model.

Note: Equipment may vary by market. Please consult your local Mitsubishi Motors dealer/distributor for details.

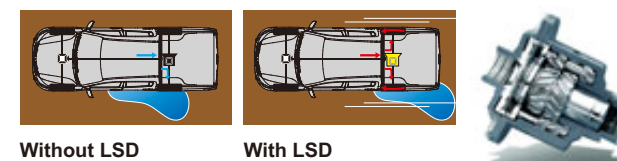

Hybrid LSD

The hybrid-type Limited Slip Differential combines torque-sensing helical gears with speed-sensing viscous coupling to maintain excellent traction on slippery and rugged surfaces. An internal clutch escape mechanism also prevents loss of torque if a wheel starts spinning. Hybrid LSD works with ABS to enhance driving safety.

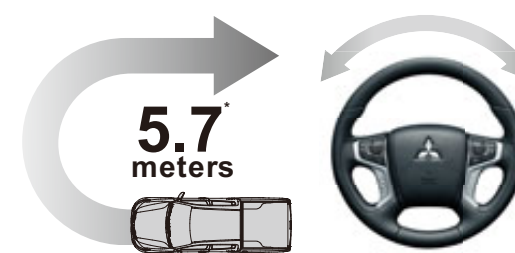


Class-leading 5.7m turning radius

The turning radius is surprisingly small for a vehicle of this size, making the L200 especially easy to park and maneuver.

* 2WD: 5.7 meters, 4WD: 5.9 meters, 2WD Hi-Rider: 5.9 meters

Quick, responsive handling

Steering is sporty and responsive, requiring less effort to turn.

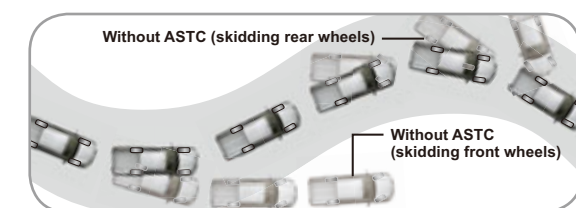


Active Stability & Traction Control (ASTC)*

Active Stability & Traction Control independently regulates braking force to the wheels during cornering to help maintain excellent vehicle stability when needed. It also optimizes traction to prevent loss of torque whenever wheel spin is detected by controlling engine output and applying brake force to the spinning wheels.

* Only available on models equipped with 4N15 engine.

Note: The control capabilities of ASTC are supplemental only. Please drive safely and never rely solely on these functions while driving. Be sure to use the same specified type and size of tires on all 4 wheels. Do not install any aftermarket limited slip differential on your vehicle. Please see the owner's manual for additional information.

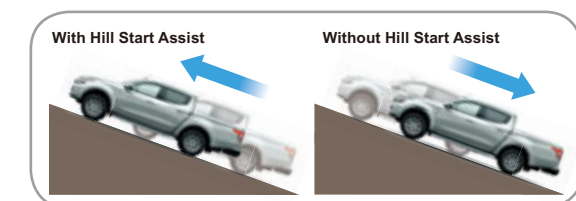

Hill Start Assist (HSA)*

When starting on a steep slope, HSA helps prevent you from rolling backwards while you release the brake by maintaining the braking force for up to two seconds until the accelerator is applied.

* Only available on models equipped with 4N15 engine.

Note: Hill Start Assist (HSA) is not a substitute for safe driving. Never rely solely on this function while driving on steep roads. Your vehicle may move backwards if the brake pedal is not sufficiently depressed, or if the road is very steep or slippery. This function is not designed to keep the vehicle stopped in place on uphill slopes for more than 2 seconds. Do not rely on this function to maintain a stopped position as an alternative to depressing the brake pedal. Please see the owner's manual for additional information.

Tough for work. Stylish for pleasure.

The muscular L200 is built tough to handle whatever work challenges come your way. Its ample storage capacity and durability are matched by handsome styling and spacious comfort that your traveling companions will appreciate. Streamlined styling also contributes to class-leading aerodynamics and a smooth, quiet ride.



4WD GL Single Cab with optional equipment / Titanium Gray Metallic [U17]

Room to spare

The stylish L200 never forgets its true calling. When you're hard at work, it provides all the space and tough reliability you need. The spacious cargo bed is also solidly reinforced to offer outstanding durability.



Cargo bed inner hook x 6



Multipurpose cargo bed outer hooks

Note: Equipment may vary by market. Please consult your local Mitsubishi Motors dealer/distributor for details.



Double wishbone suspension


The rugged suspension features double wishbones with coil springs and a stabilizer bar in front, plus no-nonsense above-the-axle leaf springs in the rear for outstanding traction. The ride is stable and comfortable for all occupants.

Durable design




In front, a more rigid engine compartment and double striker in the hood safety mechanism contribute to enhanced durability and safety. In the cargo bed, the rear corners are specially reinforced to disperse the force of impact when cargo shifts and prevent damage such as cracks in the side panels.

Robust construction

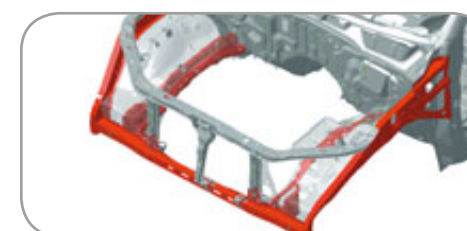

More rigid engine compartment

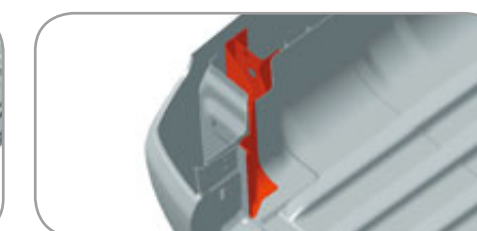

Reinforced rear corners



Hood safety mechanism with double striker


Convenience



Audio System with 6.1-inch Full-color Display
The L200 now features a display with 6.1-inch full-color touch screen. In addition to giving you full control over a wide range of audio options, the display also links to the rearview camera.

- 1 Easy-to-select menu**
The intuitive interface makes selecting functions safe and easy.
- 2 Rearview camera**
Safely navigate into even tight parking spaces.
- 3 USB connectivity**
Select music directly from your portable player.
- 4 Hands-free Bluetooth® telephone***
Incoming calls are displayed for easy viewing.

* The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by MITSUBISHI MOTORS CORPORATION is under license.

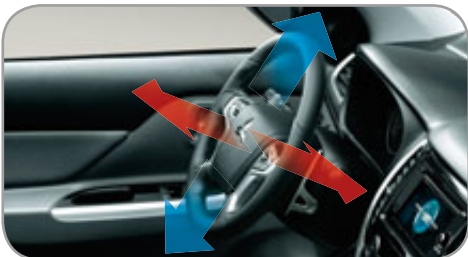

Tilt & telescopic steering



Multi-information display



Dual-zone automatic air conditioner



Keyless Operation System



Engine switch

Keyless operation system
While carrying the key, you can press a button on the outside of either front door to lock or unlock all the doors, or press the engine switch in the cockpit to start the engine.

ETACS (Electronic Time and Alarm Control System)



Power window timer
Even after shutting off the engine, the power windows can be opened or closed for 30 seconds before opening the door.



Headlamp auto off function
After switching off the ignition and stepping out of the car, the headlamps automatically turn off to help conserve battery power.



Auto door relock system
Within 30 seconds of pressing the unlock button from outside the car, this system will automatically relock all the doors if none have been opened.




Auto speed adjustable wipers
In the Timing mode, the window wipers operate faster at higher vehicle speeds.

Safety

RISE body

Collision safety performance is significantly enhanced by Mitsubishi Motors' RISE (Reinforced Impact Safety Evolution) body, which efficiently absorbs energy and maintains high cabin integrity in the event of a collision.

Rigid lightweight body

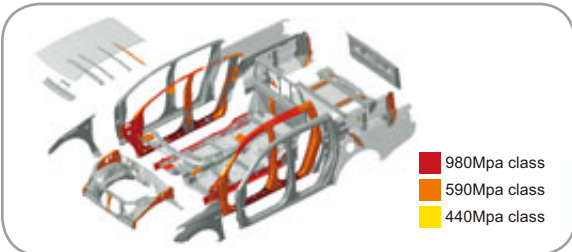

The body is extremely sturdy and lightweight, thanks to the generous use of high tensile strength steel plates that also contribute to a high level of collision safety.



7 SRS airbags

In the event of a collision, seven SRS airbags help protect you and your passengers by absorbing the force of impact. The system includes front airbags, front side airbags, curtain airbags and a driver's knee airbag. (Optional on GLS)

Note: Airbags are part of a Supplemental Restraint System (SRS). To decrease the risk of injury from a deploying airbag, always wear your seat belt, sit upright in the middle of the seat and do not lean against the door. Always place children 12 and under in the rear seat and use appropriate child restraints. Never place a rear-facing infant restraint in the front seat. Please see the owner's manual and the instructions provided with your child restraint for additional information.



Double pretensioner (Driver's seat)


Pretensioners

Pretensioners on the front seatbelts automatically tighten the belts in the event of a frontal collision to help restrain the driver and front passenger and reduce the force of impact when the front airbags are deployed. (Single pretensioner optional for driver and front passenger. Double pretensioner optional for driver on GLS.)



Immobilizer

The engine can only be started when a dedicated key with matching authentication code is used. This advanced security system effectively prevents vehicle theft.

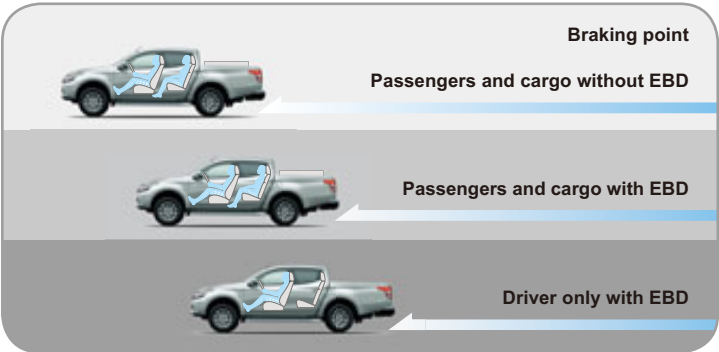

ABS with EBD

The L200's ABS gives you the ability to suddenly maneuver safely around obstacles as you slow down. EBD (Electronic Brake-force Distribution) assists by applying additional force to the rear brakes as needed, enabling quicker stops even when carrying passengers and heavy loads.

Note: ABS can help a driver prevent unsafe situations while braking, but is never a substitute for safe driving. ABS does not always reduce stopping distances. Stopping distance can be influenced by many factors including road surface conditions and friction between the tires and the road surface.



Auto dimming rear view mirror

This mirror automatically reduces glare from the headlights of cars behind you to maintain a clear rear view and support safer driving.



Power windows

The driver's side window can be raised or lowered with a single touch and features an anti-trap mechanism for safety.

Single Cab GL (2WD/4WD)

Available engines: 2.4-liter ECI-MULTI (2WD only), 2.5-liter turbocharged DI-D (2WD/4WD), 2.5-liter intercooled turbocharged DI-D (2WD only)



Double Cab GL (2WD/4WD)

Available engine: 2.4-liter ECI-MULTI, 2.5-liter turbocharged DI-D



Double Cab GLX (2WD Hi-Rider)

Available engines: 2.5-liter intercooled turbocharged DI-D High Power, 2.5-liter intercooled turbocharged DI-D Standard



Double Cab GLX (4WD)

Available engine: 2.5-liter intercooled turbocharged DI-D Standard



Double Cab GLS (4WD)

Available engines: NEW 2.4-liter intercooled turbocharged DI-D High Power, 2.5-liter intercooled turbocharged DI-D High Power, 2.5-liter intercooled turbocharged DI-D Standard



Note: Equipment may vary by market. Please consult your local Mitsubishi Motors dealer/distributor for details. Only LHD models are available (except LHD and RHD on Double Cab GLS).

EXTERIOR COLORS



Grayish Brown Metallic (C06)



Impulse Blue Metallic (D23)



Earth Green Metallic (F27)



Red Solid (R59)



Titanium Gray Metallic (U17)



Sterling Silver Metallic (U25)



White Solid (W32)



White Pearl (W54)



Black Mica (X08)


SEAT MATERIALS AND COLORS




Vinyl (Gray)




Fabric (Light Gray)



Fabric (Dark Gray)



High Grade Fabric (Dark Gray)



Leather (Black)

EXTERIOR AND INTERIOR COLOR COMBINATIONS

■ Standard □ Optional — Not available

Grade		Single cab	Double cab		
			GL	GLX	GLS
Seat materials and colors	Vinyl (Gray)	■	■	—	—
	Fabric (Light Gray)	□	□	■	—
	Fabric (Dark Gray)	□	□	□	—
	High Grade Fabric (Dark Gray)	—	—	—	■
	Leather (Black)	—	—	—	□
Exterior colors	Grayish Brown Metallic	C06	■	■	■
	Impulse Blue Metallic	D23	■	■	■
	Earth Green Metallic	F27	■	■	■
	Red Solid	R59	■	■	■
	Titanium Gray Metallic	U17	■	■	■
	Sterling Silver Metallic	U25	■	■	■
	White Solid	W32	■	■	■
	White Pearl	W54	—	■	■
	Black Mica	X08	■	■	■

Note: Colors shown may differ slightly from actual colors due to printing process. Please consult your local Mitsubishi Motors dealer/distributor for actual colors.

Note: Equipment may vary by market. Please consult your local Mitsubishi Motors dealer/distributor for details.

STANDARD EQUIPMENT AND OPTIONS



1



2



3



4

- 1 17-inch alloy wheel with 245/65R17 tire
- 2 16-inch alloy wheel with 245/70R16 tire
16-inch alloy wheel with 265/70R16 tire
- 3 16-inch alloy wheel with 205R16C 8PR tire
- 4 15-inch alloy wheel with 195R15C 8PR tire



Dark chrome grille



Chrome outer door handle

Chrome rear gate handle



Chrome power door mirror with side turn lamp



Front fog lamp with black bezel



Wide titanium gray fender



Rear body guard



"MITSUBISHI" decal on rear gate



Plate-type side step



Chrome rear step bumper

Genuine accessories



3-spoke urethane steering wheel (with airbag)



4-spoke leather-wrapped steering wheel (with airbag)

Note: Actual accessories may vary from those shown or change without notice. Available accessories may vary by market.

STANDARD AND OPTIONAL EQUIPMENT

■ Standard □ Optional — Not available

Model		LHD model																		RHD model																
		Single cab						Double cab												Single cab		Double cab														
		2WD		4WD	2WD		2WD Hi-Rider		4WD				2WD		4WD		2WD		4WD																	
		GL		5M/T	GL		GLX		GL		GLX		GLS		GLS		GL		GL		GLS		GLS													
		2.4L MPI	2.5L T/C DI		2.5L IC T/C DI	2.5L T/C DI	2.4L MPI	2.5L T/C DI	2.5L IC T/C DI (ST)	2.5L IC T/C DI (HP)	2.4L MPI	2.5L T/C DI	2.5L IC T/C DI (ST)	2.5L IC T/C DI (ST)	2.5L IC T/C DI (ST)	2.5L IC T/C DI (HP)	2.4L IC T/C DI (HP)	2.5L T/C DI	2.5L T/C DI	2.5L T/C DI	2.5L IC T/C DI (ST)	2.5L IC T/C DI (HP)	2.4L IC T/C DI (HP)													
Body type	Drive system	Trim level / Grade	Transmission	Engine	Model code	KJ4TE NMLW	KJ3TE NJTL	KJ3TE NJFL	KL3TE NJTL	KJ4TJ NJMLW	KJ3TJ NJTL	KK3TJ NUFL	KK3TJ YUFL	KL4TJ NJML	KL3TJ NJTL	KL3TJ NUFL	KL3TJ NHFL	KL3TJ YHFL	KL3TJN HFPL	KL3TJY HFPL	KL1TJ HFPL	KL1TJY HFPL	KJ3TE NJTR	KL3TE NJTR	KJ3TJ NJTR	KL3TJ NJTR	KL3TJ NHFR	KL3TJ YHFR	KL3TJ NHFPR	KL3TJ YHFPR	KL1TJ JHFPR	KL1TJ YHFPR				
Drivetrain and chassis																																				
Drivetrain	5-speed manual transmission	■	■	■	■	■	■	■	—	■	■	■	■	—	■	■	■	■	—	■	■	■	■	■	■	■	■	■	■	■	■	■	■			
	6-speed manual transmission	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
Suspension and differential	5-speed automatic transmission	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
	Sport mode (4-position + manual mode) with electric shift lock and key interlock	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	2WD	■	■	■	—	■	■	■	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Super Select 4WD-II	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Easy Select 4WD	—	—	—	■	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Immobilizer (master key x 2 with protector)	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□				
	Heavy duty suspension	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
	Comfort suspension	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Front stabilizer	—	—	—	■	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Brakes	Limited-slip differential (mechanical type)	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□			
Limited-slip differential (hybrid type)		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
Front	LSPV (Load Sensing Proportioning Valve)	■	■	■	■	■	■	■	—	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■			
	ABS (Anti-lock Braking System) with EBD (Electronic Brake-force Distribution)	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□				
Rear	Ventilated disc brakes (Diameter 270mm)	■	■	■	—	■	■	■	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Ventilated disc brakes (Diameter 294mm)	—	—	—	■	—	■	■	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
Tires and wheels	10-inch drum brakes	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
	11.6-inch drum brakes	—	—	—	■	—	—	—	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
Exterior	Tires and wheels	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
	Front & Rear: 195R15C 8PR tires with 15-inch steel wheels (chrome center caps)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Spare: 195R15C 8PR + 15-inch steel wheel	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Front & Rear: 195R15C 8PR tires with 15-inch alloy wheels	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Spare: 195R15C 8PR + 15-inch steel wheel	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Front & Rear: 205R16C 8PR tires with 16-inch steel wheels (chrome center caps)	—	—	—	■	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Spare: 205R16C 8PR + 16-inch steel wheel	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Front & Rear: 205R16C 8PR tires with 16-inch alloy wheels	—	—	—	□	—	—	—	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□				
	Spare: 205R16C 8PR + 16-inch steel wheel	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Front & Rear: 205R16C 8PR tires with 16-inch alloy wheels	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Spare: 205R16C 8PR + 16-inch alloy wheel	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Front & Rear: 245/70R16 tires with 16-inch alloy wheels	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Spare: 245/70R16 + 16-inch steel wheel	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Front & Rear: 265/70R16 tires (mud & snow) + 16-inch alloy wheels	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Spare: 265/70R16 (mud & snow) + 16-inch alloy wheel	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Front & Rear: 245/65R17 tires with 17-inch alloy wheels	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Spare: 245/65R17 + 17-inch alloy wheel	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Grille	Front grille: material black	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■			
		Front grille: dark chrome	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
	Bumpers	Front bumper: material black	■	■	■	■	■	■	■	—	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■		
Under garnish: material black		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
Lamps	Front bumper: color-keyed	□	—	—	—	□	□	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■			
	Under garnish: material black	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
Lamps	Front bumper: color-keyed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Under garnish: silver paint	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
Front	Halogen headlamp with amber upper accent and material black extension	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■				
	Halogen headlamp with frost upper accent and dark chrome extension	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	HID headlamps with LED daytime running lamps & manual leveling device	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Auto lighting control and auto rain-sensing variable intermittent windshield wipers	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Front fog lamps with material black bezel	—	—	□	□	—	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□				
	Front fog lamps with silver painted bezel	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
	Side turn lamp on fender clear lens & amber bulb	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■									

STANDARD AND OPTIONAL EQUIPMENT

■ Standard □ Optional — Not available

Model Body type Drive system Trim level / Grade Transmission Engine		LHD model																RHD model													
		Single cab				Double cab												Single cab		Double cab											
						2WD				2WD Hi-Rider				4WD						4WD											
		GL				GLX				GLS				GLS				GL		GL		GLS									
		5M/T				5M/T				5M/T				5A/T				5A/T				5M/T		5A/T		5A/T					
Model code		KJ4TE MPI	2.5L T/C DI	KJ3TE NJFL	2.5L T/C DI	KJ4TU MPI	2.5L T/C DI	KJ3TU NJFL	2.5L IC T/C DI (ST)	2.5L IC T/C DI (HP)	2.4L MPI	2.5L T/C DI	KL3TU NJFL	2.5L IC T/C DI (ST)	2.5L IC T/C DI (ST)	2.5L IC T/C DI (HP)	2.4L IC T/C DI (HP)	KJ3TE NJTR	2.5L T/C DI	KJ3TU NJTR	2.5L T/C DI	KL3TU NHFR	KL3TU YHFR	2.5L IC T/C DI (ST)	2.5L IC T/C DI (HP)	6M/T	5A/T	2.4L IC T/C DI (HP)	KL1TU YHFR		
Interior Console	Ashtray on instrument panel	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Floor console with lid - Cup holder for front seats - Can type ashtray - 12V accessory socket in console box - Console trim; material black	□	□	□	□	□	□	■	■	□	□	■	■	■	■	■	■	■	□	□	□	□	■	■	■	■	■	■	■	■	
	Floor console with lid - Cup holder for front seats - Can type ashtray - 12V accessory socket in console box - Console trim; with silver accent for 2.5L MT models*1 - Console trim; with piano black panel & silver painted accent for 2.5L AT models*1 & 2.4 L AT models	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Cigar lighter	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Glove box with key cylinder and illumination	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Glove box damper	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Digital quartz clock	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	
Meter	Combination meter cluster with material black garnish (speed & tachometer)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Combination meter cluster with silver painted garnish (speed & tachometer)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Combination meter cluster with chrome garnish (speed & tachometer)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Functional	Multi information display; amber type	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Multi information display; black type	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Rheostat	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Center door locking system	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	
	Child-proof rear door locks	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Master key x 2	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Master key x 2 (with protector x 1)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Keyless entry system x 2 (with protector x 2)	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	
	Keyless Operation System with engine start switch	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Ignition key cylinder with illumination	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Ventilation	Rear view camera	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Front variable intermittent windshield wipers with washers	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Headlamp washer	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Cruise Control	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Seat belt warning lamp (driver's side)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Seat belt warning lamp (driver's & passenger's side)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Ignition key reminder	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Seat belt warning buzzer	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
	Heater	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Manually controlled cooler with air inlet selector	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Audio	Manual air conditioning	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Automatic air conditioning	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Dual-zone automatic air conditioning	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Air filter	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Windshield & side defroster	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Audio less (instrument panel accessory box (1DIN) with lid)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Wide 2DIN AM/FM CD player	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	Wide 2DIN AM/FM CD display audio	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	2 speakers	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
4 speakers	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
6 speakers (with 2 tweeters)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
USB port	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Pillar antenna	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Roof antenna	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

*1 For limited countries only *2 Separate seat package *3 Optionally removable

Model		LHD model										
		Single cab				Double cab						
		2WD			4WD	2WD		2WD Hi-Rider		4WD		
		Engine	2.4 MPI	2.5 TC DI-D	2.5 IC/TC DI-D	2.5 TC DI-D	2.4 MPI	2.5 TC DI-D	2.5 IC/TC DI-D	2.5 IC/TC DI-D High power	2.4 MPI	2.5 TC DI-D
		Price class	GL			GL	GL		GLX		GL	
		Model code	KJ4TENJMLW	KJ3TENJTL	KJ3TENJFL	KL3TENJTL	KJ4TJNJMLW	KJ3TJNJTL	KK3TJNUFL	KK3TJYUFL	KL4TJNJML	KL3TJNJTL
		Dimensions and weights										
Overall length	mm	5075				5200				5200		
Overall width	mm	1785				1785				1785		
Overall height	mm	1655			1780	1655		1775		1775		
Wheelbase	mm	3000				3000				3000		
Ground clearance	mm	200			200 (212*1)	200		200 (212*1)		200 (212*1)		
Cargo floor height	mm	710			845	715		845		845		
Curb weight	kg	1410	1500	1505	1690	1510	1590	1705	1735	1690	1775	
Gross vehicle weight	kg	2570			2760	2525	2570	2760		2760	2850	
Seating capacity	persons	3				6		5		6		
Performance												
Max. speed*	km/h	169	152	165	147	169	152	167	169	161	147	
Min. turning radius	m	5.7			5.9	5.7		5.9		5.9		
Engine												
Type (code)		2.4-liter 16-valve inline-4 SOHC (4G64)	2.5 liter 16-valve inline-4 turbocharged DOHC diesel (4D56)	2.5 liter 16-valve inline-4 intercooled turbocharged DOHC diesel (4D56)	2.5 liter 16-valve inline-4 turbocharged DOHC diesel (4D56)	2.4-liter 16-valve inline-4 SOHC (4G64)	2.5 liter 16-valve inline-4 turbocharged DOHC diesel (4D56)	2.5 liter 16-valve inline-4 intercooled turbocharged DOHC diesel Standard (4D56)	2.5 liter 16-valve inline-4 intercooled turbocharged DOHC diesel High Power (4D56)	2.4-liter 16-valve inline-4 SOHC (4G64)	2.5-liter 16-valve inline-4 turbocharged DOHC diesel (4D56)	
Displacement	cc	2,351	2,477			2,351	2,477			2,351	2,477	
Max. output (EEC net)	kW (PS)/rpm	97 (132)/5,250	81 (110)/4,000	94 (128)/4,000	81 (110)/4,000	97 (132)/5,250	81 (110)/4,000	100 (136)/4,000	131 (178)/4,000	97 (132)/5,250	81 (110)/4,000	
Max. torque (EEC net)	N·m (kg·m)/rpm	202 (20.6)/4,000	200 (20.4)/1,500-3,500	240 (24.5)/1,500-3,500	200 (20.4)/1,500-3,500	202 (20.6)/4,000	200 (20.4)/1,500-3,500	324 (33.1)/2,000	400 (40.8)/2,000	202 (20.6)/4000	200 (20.4)/1500-3,500	
Fuel System												
Fuel supply system		ECI-MULTI (Electronic Controlled Injection-Multi Point Injection)	Electronic Common Rail direct injection			ECI-MULTI (Electronic Controlled Injection-Multi Point Injection)	Electronic Common Rail direct injection			ECI-MULTI (Electronic Controlled Injection-Multi Point Injection)	Electronic Common Rail direct injection	
Fuel tank capacity	liters	75				75				75		
Drive system												
Type		2WD			Easy Select 4WD	2WD				Easy Select 4WD		
Transmission												
Type		5-speed manual				5-speed manual				5-speed automatic with Sports Mode	5-speed manual	
Steering												
Type		Rack-and-pinion, power assisted										
Suspensions												
Front		Wishbone, coil springs										
Rear		Elliptic leaf, springs										
Brakes												
Front		Ventilated disc brakes (Diameter 270mm)			Ventilated disc Brakes (Diameter 294mm)	Ventilated disc brakes (Diameter 270mm)		Ventilated disc brakes (Diameter 294mm)				
Rear		11.6-inch drum brakes				10-inch drum brakes		11.6-inch drum brakes				
Tires and wheels												
Tires (front and rear)	Standard	195R15C 8PR			205R16C 8PR	195R15C 8PR		205R16C 8PR				

Note: Equipment may vary by market. Please consult your local Mitsubishi Motors dealer/distributor for details.

TECHNICAL SPECIFICATIONS

Model		LHD model						RHD model											
	Body type	Double cab						Single cab		Double cab									
	Drive system	4WD						2WD	4WD	2WD	4WD								
	Engine	2.5 IC/TC DI-D	2.5 IC/TC DI-D		2.5 IC/TC DI-D High power		2.4 IC/TC DI-D High power		2.5 TC DI-D	2.5 TC DI-D	2.5 TC DI-D	2.5 TC DI-D	2.5 IC/TC DI-D		2.5 IC/TC DI-D High power		2.4 IC/TC DI-D High power		
	Price class	GLX	GLS						GL		GL	GL	GLS						
	Model code	KL3TJNUFL	KL3TJNHFL	KL3TJYHFL	KL3TJNHFPL	KL3TJYHFPL	KL1TJJHFPL	KL1TJYHFPL	KJ3TENJTR	KL3TENJTR	KJ3TJNJTR	KL3TJNJTR	KL3TJNHFR	KL3TJYHFR	KL3TJNHFPR	KL3TJYHFPR	KL1TJJHFPR	KL1TJYHFPR	
Dimensions and weights																			
Overall length	mm	5200						5075		5200									
Overall width	mm	1785	1815						1785		1815								
Overall height	mm	1775	1780						1655	1780	1655	1775	1780						
Wheelbase	mm	3000						3000		3000									
Ground clearance	mm	200 (207*1)	205 (205*1/220*2/205*3/220*4)				205 (205*1)		200	200 (212*1)	200	200 (212*1)	205 (205*1/220*2/205*3/220*4)		205 (205*1/220*2/205*3/220*4)		205 (205*1/220*2/205*3/220*4)		
Cargo floor height	mm	845	850						710	845	715	845	850						
Curb weight	kg	1805	1820	1830	1835	1850	1840	1845	1500	1690	1590	1775	1820	1830	1835	1850	1835	1840	
Gross vehicle weight	kg	2850			2870	2900	2870		2570	2760	2570	2850	2850		2870	2900	2870		
Seating capacity	persons	5						3		6		5							
Performance																			
Max. speed*	km/h	167		165	179	175	179	177	152	147	152	147	167	165	179	175	179	177	
Min. turning radius	m	5.9						5.7	5.9	5.7	5.9	5.9							
Engine																			
Type (code)		2.5-liter 16-valve inline-4 intercooled turbocharged DOHC diesel Standard (4D56)			2.5-liter 16-valve inline-4 intercooled turbocharged DOHC diesel High Power (4D56)		2.4-liter 16-valve inline-4 intercooled turbocharged DOHC diesel High Power (4N15)		2.5 liter 16-valve inline-4 turbocharged DOHC diesel (4D56)		2.5 liter 16-valve inline-4 turbocharged DOHC diesel (4D56)	2.5-liter 16-valve inline-4 turbocharged DOHC diesel (4D56)	2.5-liter 16-valve inline-4 intercooled turbocharged DOHC diesel Standard (4D56)		2.5-liter 16-valve inline-4 intercooled turbocharged DOHC diesel High Power (4D56)		2.4-liter 16-valve inline-4 intercooled turbocharged DOHC diesel High Power (4N15)		
Displacement	cc	2,477						2,442		2,477		2,477	2,477	2,477		2,477		2,442	
Max. output (EEC net)	kW (PS)/rpm	100 (136)/4,000	100 (136)/4,000		131 (178)/4,000		133 (181)/3,500		81 (110)/4,000	81 (110)/4,000	81 (110)/4,000	81 (110)/4,000	100 (136)/4,000		131 (178)/4,000		133 (181)/3,500		
Max. torque (EEC net)	N·m (kg-m)/rpm	324 (33.1)/2,000	324 (33.1)/2,000		400 (40.8)/2,000		430 (43.9)/2,500		200 (20.4)/1,500-3500	200 (20.4)/1,500-3500	200 (20.4)/1,500-3500	200 (20.4)/1,500-3500	324 (33.1)/2,000		400 (40.8)/2,000		430 (43.9)/2,500		
Fuel System																			
Fuel supply system		Electronic Common Rail direct injection						Electronic Common Rail direct injection		Electronic Common Rail direct injection									
Fuel tank capacity	liters	75						75		75									
Drive system																			
Type		Easy Select 4WD			Easy Select 4WD	Super Select 4WD-II	Easy Select 4WD	Super Select 4WD-II	2WD	Easy Select 4WD	2WD	Easy Select 4WD				Super Select 4WD-II	Easy Select 4WD	Super Select 4WD-II	
Transmission																			
Type		5-speed manual	5-speed automatic with Sports Mode	5-speed manual	5-speed automatic with Sports Mode	6-speed manual	5-speed automatic with Sports Mode	5-speed manual		5-speed manual			5-speed automatic with Sports Mode	5-speed manual	5-speed automatic with Sports Mode	6-speed manual	5-speed automatic with Sports Mode		
Steering																			
Type		Rack-and-pinion, power assisted						Rack-and-pinion, power assisted											
Suspensions																			
Front		Wishbone, coil springs						Wishbone, coil springs											
Rear		Elliptic leaf, springs						Elliptic leaf, springs											
Brakes																			
Front		Ventilated disc Brakes (Diameter 294mm)						Ventilated disc brakes (Diameter 270mm)	Ventilated disc Brakes (Diameter 294mm)	Ventilated disc brakes (Diameter 270mm)	Ventilated disc Brakes (Diameter 294mm)								
Rear		11.6-inch drum brakes						10-inch drum brakes	11.6-inch drum brakes	10-inch drum brakes	11.6-inch drum brakes								
Tires and wheels																			
Tires (front and rear)	Standard	205R16C 8PR	245/70R16				195R15C 8PR	205R16C 8PR	195R15C 8PR	205R16C 8PR	245/70R16								

*1 Model with reinforced front skid plate and floor undercover

*2 Model with reinforced front skid plate and floor undercover + 265/70R16 tires

*3 Model with reinforced front skid plate and floor undercover + 245/65R17 tires


*4 Model with floor undercover + 265/70R16 tires

* Measured by MITSUBISHI MOTORS CORPORATION


Note: These specifications are subject to change without notice. Please consult your local Mitsubishi Motors dealer/distributor for detailed specifications.

DIMENSIONAL VIEWS


Single Cab (2WD)

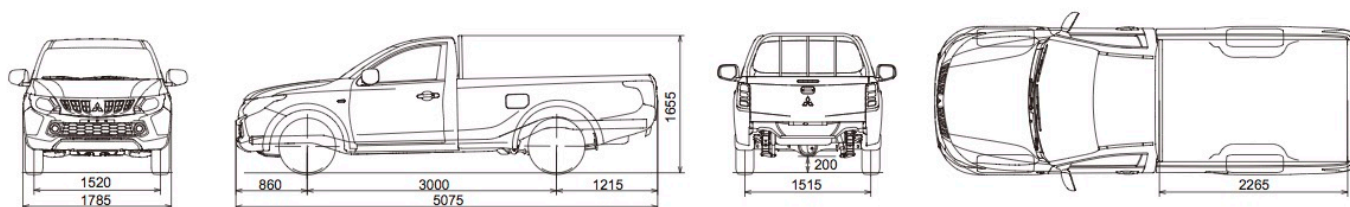


Single Cab (4WD)

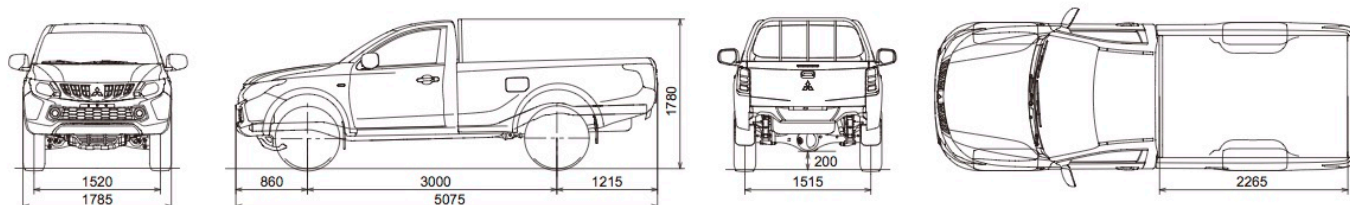

Double Cab (2WD)

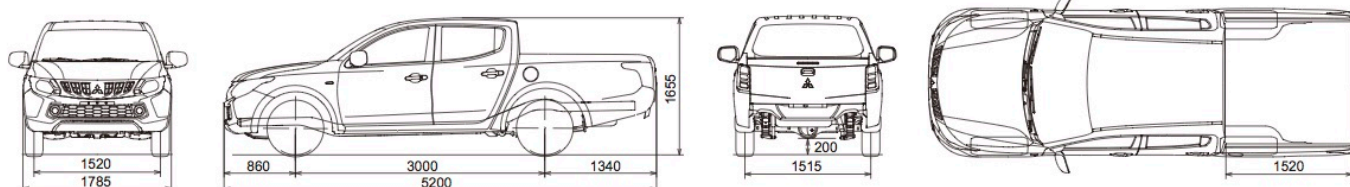

Double Cab (4WD/2WD Hi-Rider)

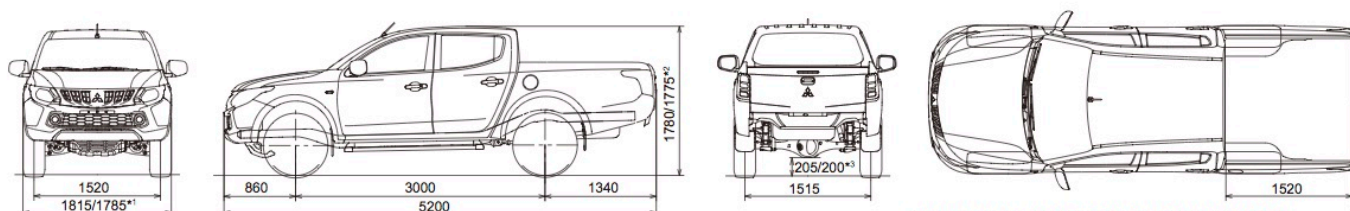

*1 Overall width: 1815mm for GLS, 1785mm for GLX/GL

*2 Overall height: 1780mm for GLS, 1775mm for GLX/GL

*3 Minimum ground clearance: 205mm for GLS, 200mm for GLX/GL

All measurements in millimeters



www.facebook.com/MitsubishiMotors.en



www.youtube.com/user/MitsubishiMotorsAd



www.mitsubishi-motors.com

©2016–2017 MITSUBISHI MOTORS CORPORATION. All rights reserved.

Ge/E32C225Jan.17T Printed in Japan