


VOLVO
264TE

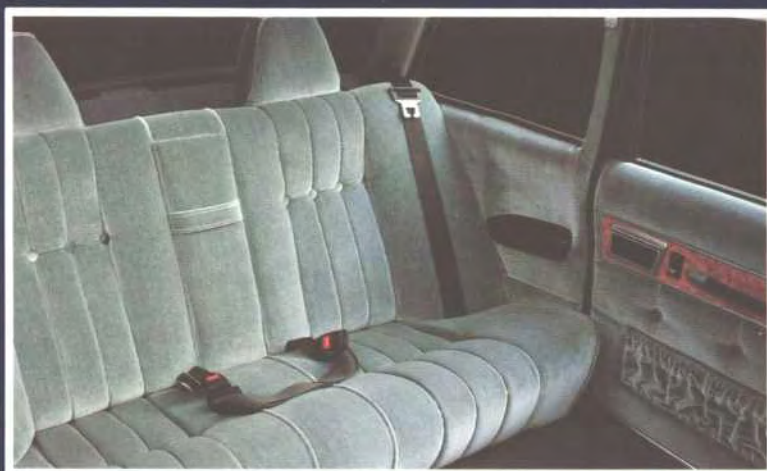

This exclusive Volvo 264 TE fulfils the most exacting requirements on comfort, reliability and safety.

The Volvo 264 TE offers high-class comfort. The plush upholstery and trim is ideally matched by the high quality wall-to-wall carpeting. The rear seat is complete with head restraints, special reading lamps and a foldable center armrest for added comfort. The wide door angle opening ensures dignified entry and exit.

The Volvo 264 TE has a smooth and powerful V6 engine. This engine has been designed to combine utter reliability and long service life with ease of starting, good low-speed pulling power and plenty of reserves for fast, safer overtaking. A three stage automatic transmission with torque converter and six illuminated selector positions are standard on the Volvo 264 TE.

The Volvo 264 TE is a safe car with a strong body and impact absorbing crumple zones front and rear. The passenger compartment is in effect a steel cage also protected at the sides by anti-intrusion members in the doors. The steering column is collapsible. The seats are anchored securely to the floor. The fuel tank is safely located out of harm's way, entirely separate from the passenger and luggage compartments.







The renowned Volvo seat - with adjustable lumbar support - has been designed in co-operation with medical experts. That ensures an alert and safe driver.



Adjustable reading lamps for rear-seat passengers - one on each side.



All controls are positioned logically on the centre console. At the base of the centre console is a stereo-radio with cassette player.



The wide door opening angle permits dignified entry and exit.



In the immense boot, which is trimmed to the same high standards as the interior, cases can be stood handles up for convenience.



The foldable armrest houses controls for the reading lamps and the volume control for the stereo loudspeakers. Space is provided for a telephone.





The exclusive plush trimmed interior gives that distinctive atmosphere of elegance. The rearseat with its foldable centre armrest provides the passengers with superb travelling comfort. In the spacious and comfortable interior there are two foldable extra seats, which allows the Volvo 264 TE to carry up to **SIX** passengers plus driver. The foldable seats are of course of the same high quality that distinguish all Volvo seats. When the foldable seats are in use there are still plenty of room for the rear seats passengers - thanks to the longer wheelbase of the Volvo 264 TE.

Technical information

264 TE

ENGINE

Designation	B27E
Number of cylinders	6
Displacement, cm ³	2664
Bore x stroke, mm	88.0 x 73.0
Max. output hp at r/m DIN	140/6000
Max. output kW at r/s DIN	103/100
Max. torque kpm r/m DIN	10.8/3000
Max. torque Nm at r/s DIN	204/50
Compression ratio	8.7:1
Carburation	CI injection system
Octane rating	93
Engine block and cylinder head	Aluminium alloy
Valve system	Overhead camshafts. Rocker arms
Camshaft transmission	Chain

COOLING SYSTEM

Sealed and frost-proofed.	
Capacity approx.	10.9 litres

ELECTRICAL SYSTEM

Battery	12 V/70 Ah
Alternator rating	55 A
Ignition system	Contactless. Electronic

TRANSMISSION

Automatic transmission	3-stage. Torque converter. 6 illuminated selector positions
------------------------	--

FUEL TANK

Safety location beside rear axle.	
Capacity	13.2 Imp galls./60 litres

STEERING GEAR

Rack and pinion. Safety steering column of telescopic type. Ratios	17.1:1 Power assisted
Number of turns to lock	3.5

STANDARD EQUIPMENT¹⁾

Headlight washers and wipers	Yes
Instrumentation	Clock. Tachometer
Steering wheel diameter	400 mm. Integral foam covered
Electrically powered windows	Front and rear side windows
Tinted glazing	Yes
Upholstery	Plush
Full carpeting	Textile, deep pile
Air conditioning	Yes
Stereo loudspeakers	Built into front doors and behind rear seat
Fixed head restraints	Front and rear seats
Luggage compartment trim	Full textile carpeting
	Spare wheel cover
Luggage compartment lighting	Yes
Rims	5.5J - 14"
Steel braced radial ply tyres	185 SR 14

¹⁾The equipment items listed in this table are additional to those specified in the text below.

SUSPENSION

Front: spring strut type with stabiliser. Rear: live, carried in rubber-mounted control arms and torque rods. Transverse location by track rod. Coil springs and telescopic shock absorbers.

BRAKING SYSTEM

Power-assisted, all-disc. Dual circuit, triangle-split system. Each circuit operates simultaneously on both front wheels and one each of the rear wheels. Brake pipes of rust-resistant copper and nickel alloy. The front discs are specially ventilated. Relief valves in each circuit prevent the rear wheels from locking up prematurely during emergency braking. Master cylinder of stepped-bore type. Handbrake operates on rear wheels through separate drums.

INSTRUMENTATION

Houses in padded dashboard. Rheostat-controlled instrument lighting. Six-figure mileometer with trip-meter, fuel gauge and coolant temperature gauge. Warning lamps for charging, oil pressure, main beam, turn indicators, handbrake and brake circuit failure. Bulb integrity sensor. Glovebox lighting. Combined steering and ignition lock. Centre console: controls for electrically heated rear window, four-way hazard warning lights and also for heating, ventilation and air conditioning system. "Fasten seat belts" reminder. Cigar lighter. Ash-tray. Radio with cassette player.

OTHER STANDARD EQUIPMENT

Combined stalk for turn indicators, main and dipped

beam and headlight flasher. Combined stalk for windscreen wipers, two-speed, and electric windscreen washers. Rectangular, halogen headlights with separate reflectors for main and dipped beams. Automatic reversing lights. Engine bay light. High impact laminated windscreen. Padded sun visors. Day/night rear-view mirror of safety type. Inertia reel front seat belts. Inertia reel seat belts for two outer rear seats, lap belt in centre. Towing points front and rear.

OPTIONAL EQUIPMENT

Telephone in centre armrest. Communication radio set. Pennantstall. Curtains for rear compartment.

WEIGHTS

Kerb weight, approx 1.635 kg. Total weight, approx 2.180 kg.

WARRANTY

Twelve-month warranty irrespective of mileage.

The factory reserves the right to make changes at any time, without notice, to prices, colours, materials, equipment, specifications and models and also to discontinue models.

VOLVO